
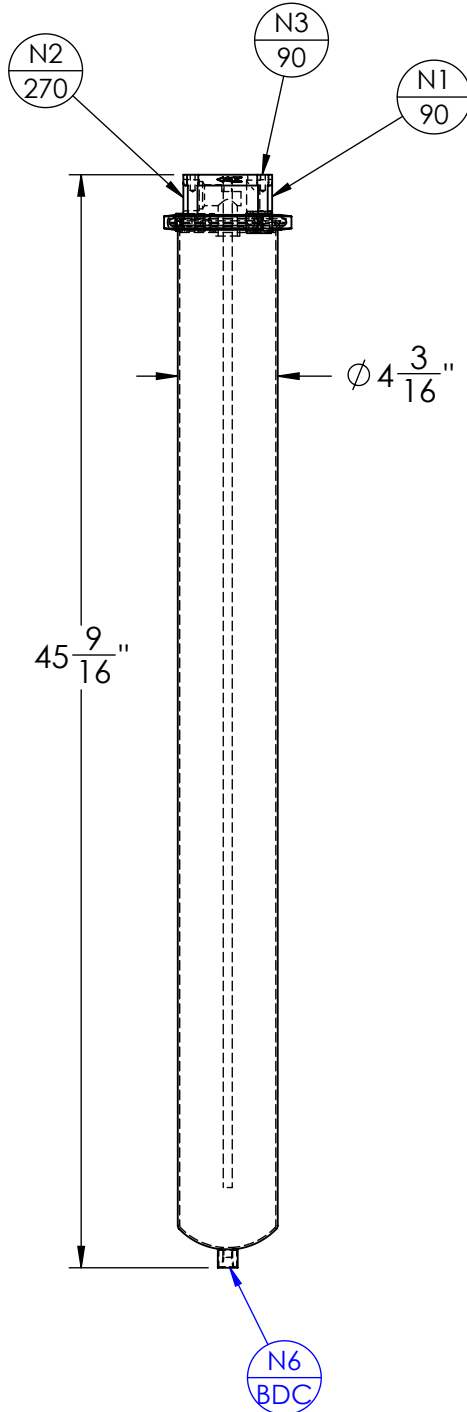


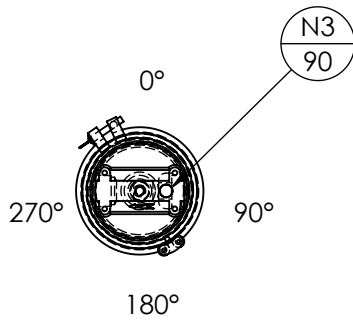

NOZZLE SCHEDULE

MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	1" NPT	INLET
N2	1	1" NPT	OUTLET
N3	1	1/4" NPT	PRESS GA
N4	0	-	VENT
N5	0	-	CLEAN DRAIN
N6	1	1/4" 3000# NPT	DIRTY DRAIN

VESSEL DESIGN CONDITIONS

CODE:	ASME SECTION VIII DIV. 1, 2010 EDITION		
M.A.W.P.:	150 PSI @ 250°F	M.D.M.T.:	-20° F @ 150 PSI
M.A.E.P.:	15 PSI @ 250°F		
CORROSION ALLOWANCE:	NONE	HYDROTEST PRESS:	195 PSI
STAMP:	'U' / NB	SERVICE:	NON LETHAL
PWHT:	N/A	RADIOGRAPHY:	N/A
MATERIAL:	SS-316	GASKET:	BUNA-N

REV.	DATE	REVISION	DRAWN	APP'D
THIRD ANGLE PROJECTION TOLERANCES-UNLESS OTHERWISE NOTED DECIMAL .X = ±.1" .XX = ±.02" .XXX = ±.005" FRACTIONAL ≤24" = ±1/16" >24" = ±1/8" ANGULAR = ± 1° MAX. MACHINED SURFACE FINISH 125/√ FIL-TREK CORPORATION CAMBRIDGE ONTARIO - CANADA www.fil-trek.com • Tel: 519.623.7448 • Fax: 519.623.8807 THIS DRAWING IS THE PROPERTY OF FIL-TREK CORPORATION AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION				
EQUIPMENT: FILTER HOUSING (LM SERIES)				
MODEL NO: S6LM01-4-1P				
CUSTOMER: -				
PARENT: NONE	DRAWN: JJJ	DATE: MAR 25 2011	JOB No.	DWG. No.
PAGE: 1 OF 1	CHK'D: CW	SCALE: NTS	V-XXXX	060-0004
				REV. No. 0