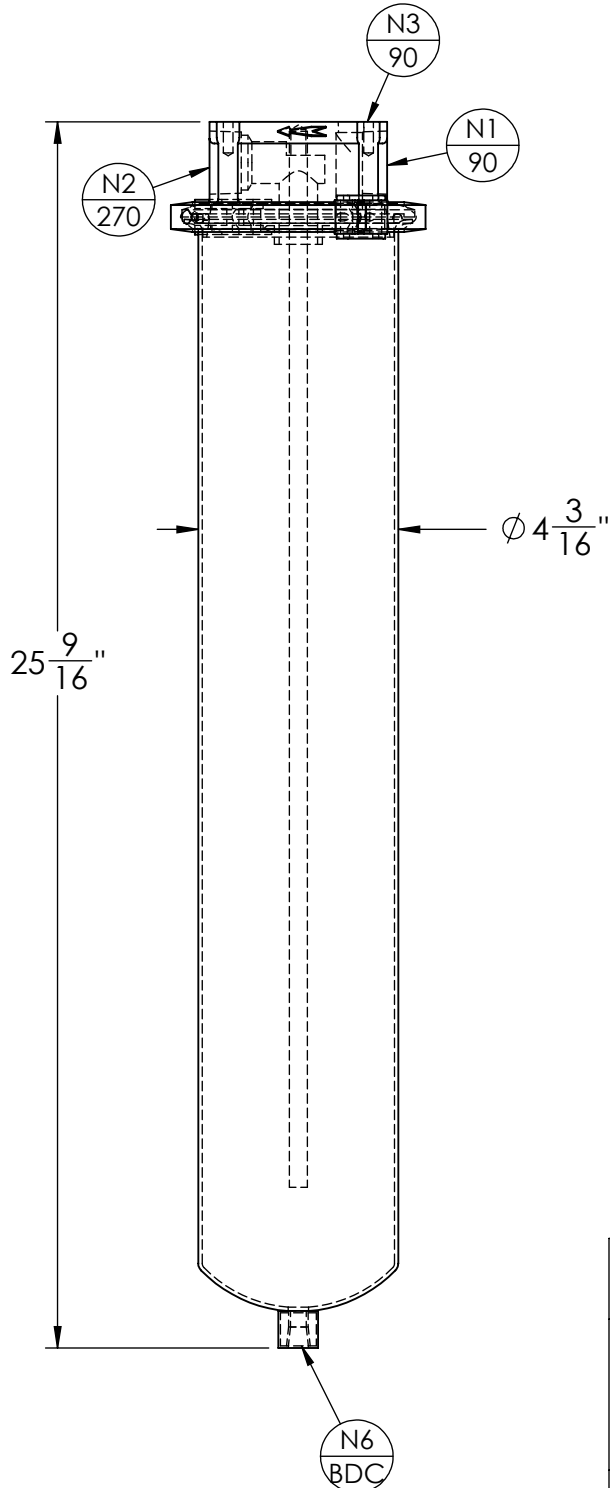
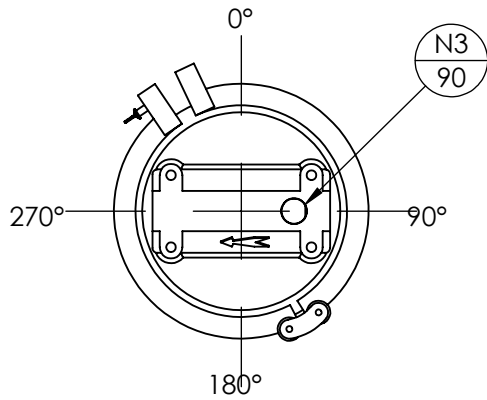


NOZZLE SCHEDULE

MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	1" NPT	INLET
N2	1	1" NPT	OUTLET
N3	2	1/4" NPT	PRESSURE GAUGE
N4	1	-	VENT
N5	1	-	CLEAN DRAIN
N6	1	1/4" 3000# NPT	DIRTY DRAIN

VESSEL DESIGN CONDITIONS

CODE:	ASME SECTION VIII DIV. 1, 2013 EDITION		
M.A.W.P.:	150 PSI @ 250°F	M.D.M.T.:	-20° F @ 150 PSI
M.A.E.P.:	15 PSI @ 250°F		
CORROSION ALLOWANCE:	NONE	HYDROTEST PRESS:	195 PSI
STAMP:	'U' / NB	SERVICE:	NON LETHAL
PWHT:	N/A	RADIOGRAPHY:	N/A
MATERIAL:	SS-316	GASKET:	BUNA-N

THIRD ANGLE PROJECTION
TOLERANCES-UNLESS OTHERWISE NOTED
DECIMAL .X =±.1" .XX =±.02" .XXX =±.005"
FRACTIONAL =±1/8"
ANGULAR =± 1°
MAX. MACHINED SURFACE FINISH 125√

 Fil-Trek		FIL-TREK CORPORATION 70 Fleming Drive Cambridge, Ontario N1T 2B1 Canada		Phone: (519) 623-7448 Fax: (519) 623-8807 Email: info@fil-trek.com Website: www.fil-trek.com	
THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION					
EQUIPMENT:		FILTER HOUSING (LM SERIES)			
MODEL NO:		S6LM01-2-1P			
CUSTOMER:		-			
DRAWN: JJJ	DATE: 20/01/2014	JOB No.	DWG. No.	REV. No.	
CHK'D: CW	SCALE: NTS	V-	060-0002-1	0	