
NOTES:

- 1. COMPLETE TURNKEY AUTOMATED STRAINER
- 2. DRY WEIGHT: 11,000 LBS, SHIPPING WEIGHT: 11,500 LBS
- 3. HYDRAULIC HEADLIFT ON EACH HOUSING
- 4. ISOLATION BUTTERFLY VALVES ON EACH HOUSING, NPS12 CL150, SS DISC, BUNA SEAT, GEAR OPERATED
- 5. ISOLATION BALL VALVES ON EACH PURGE LINE, NPT02 1000WOG STAINLESS BODY PTFE SEATS.
- 5. MANIFOLD PIPING SUPPORTS (NOT SHOWN)
- 7. N6 DISCHARGE MANIFOLD (NOT SHOWN)
- 8. COMPLETE SKID ASSEMBLY WITH CONTAINMENT PLATE, FORKLIFT POCKETS, LIFTING LUGS, LEVELLING FEET
 - Notched skid weldment to reduce skid footprint

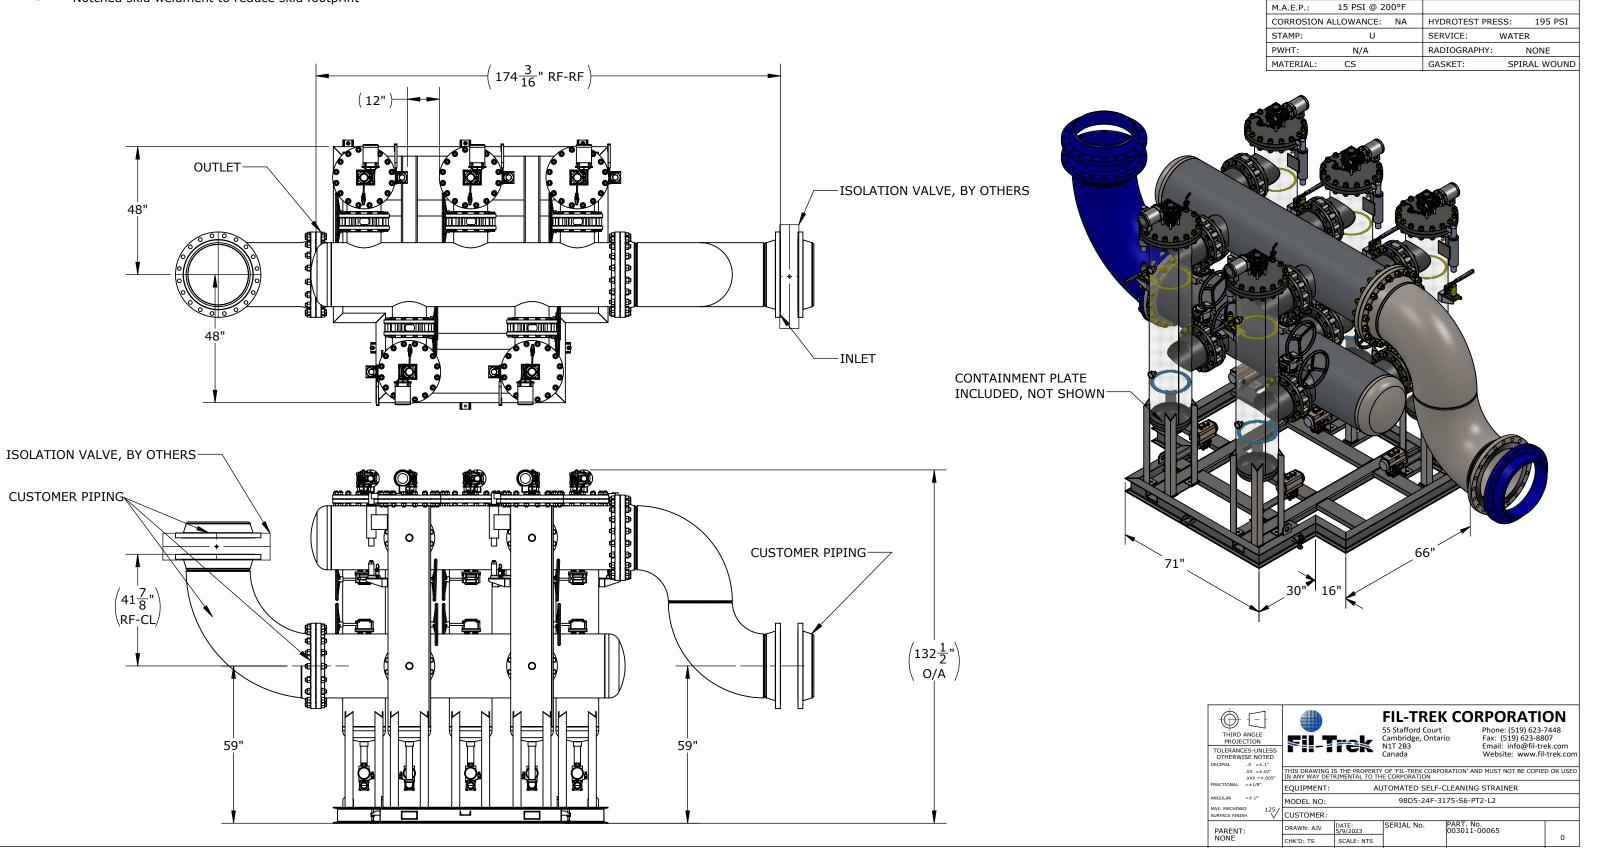

NOZZLE SCHEDULE

DESCRIPTION

INLET

PRESSURE GAUGE

VENT

CLEAN DRAIN

DIRTY DRAIN

-20° F @ 150 PSI

SIZE / RATING

24" 150# RFSO

24" 150# RFSO

1/2" 3000# NPT

2" 3000# NPT

1/4" NPT (THRU MECH SEAL)

150 PSI @ 200°F M.D.M.T.:

VESSEL DESIGN CONDITIONS

ASME SECTION VIII DIV. 1, 2021 EDITION

MARK QTY

N3 2

N1

N2

N4

N5

N6

CODE: