



BF 7-875 S6

Multi-Bag Filter Housing

Economic multi-purpose ASME code ("U") bag filter housings.

SPECIFICATIONS

Configuration	Vertical
Number of Bags	7
Material	SS316
Inlet/Outlet	6" Flange
Drains	2" Ball Valve
Vents	½" Ball Valve
Closure	Swing Bolt
Supports	Angle Iron Legs
Skids	54" L x 32" W x 30 3/4" H
Skid Pockets	10" x 6"
Design Condition	150 PSIG (10.3bar) @ 250°F (121.1°C)
Certification	U
Skid Weight	970 LBS
Maximum Flow	875 GPM
Included Accessories	DP Gauge, Vent Valve, Drain Valve

COMPATIBLE BAGS



Mera Felt Series

3-100µm absolute ratings at 98% efficiency, in sizes P1 and P2, with FDA-compliant construction and material-dependent flange types.

Available with materials that are in compliance with NSF/ANSI Standard 61



[Click to view Mara Felt](#)

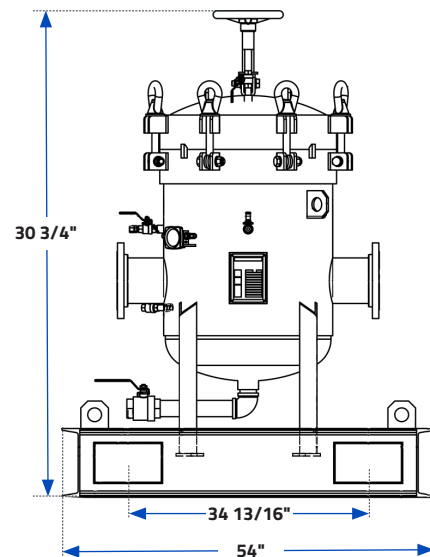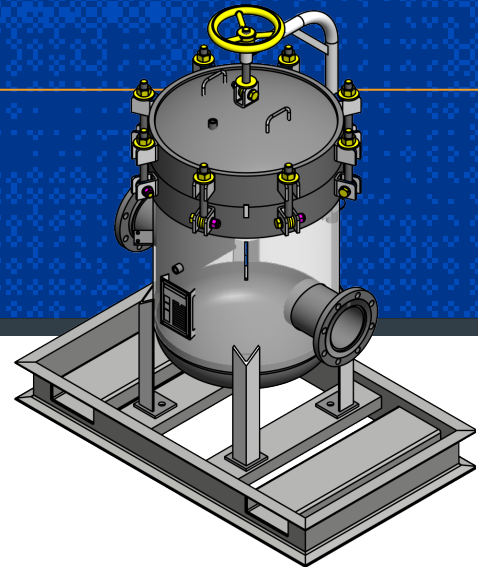

FLOW CHART

