



## BFDV 2-250 S6

### Multi-Bag Filter Housing

Economic multi-purpose ASME code ("U") bag filter housings.

### SPECIFICATIONS

Configuration	Vertical Duplex
Number of Bags	2
Material	SS316
Inlet/Outlet	4" Flange
Drains	2" Ball Valve
Vents	½" Ball Valve
Closure	Swing Bolt
Supports	Angle Iron Legs
Skids	76" L x 40" W x 64" H
Skid Pockets	10" x 6"
Design Condition	150 PSIG (10.3bar) @ 400°F (204.4 °C)
Certification	U
Skid Weight	1250 LBS
Maximum Flow	250 GPM
Included Accessories	DP Gauge, Vent Valve, Drain Valve

### COMPATIBLE BAGS



#### Mera Felt Series

3-100µm absolute ratings at 98% efficiency, in sizes P1 and P2, with FDA-compliant construction and material-dependent flange types.

Available with materials that are in compliance with NSF/ANSI Standard 61



[Click to view Mara Felt](#)

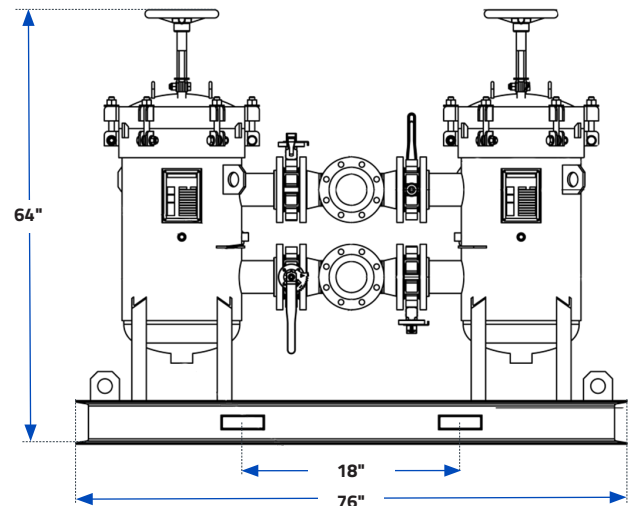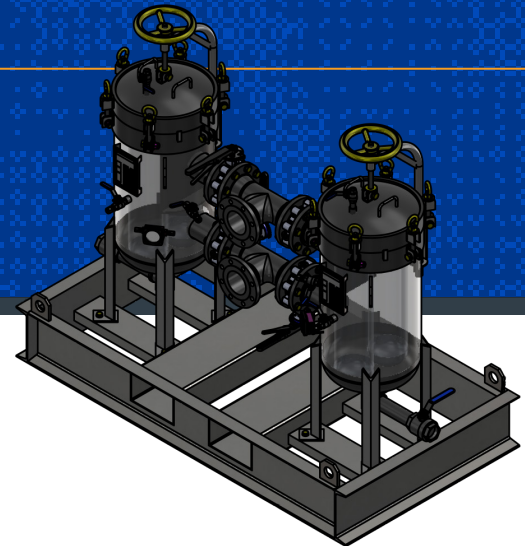

### FLOW CHART

