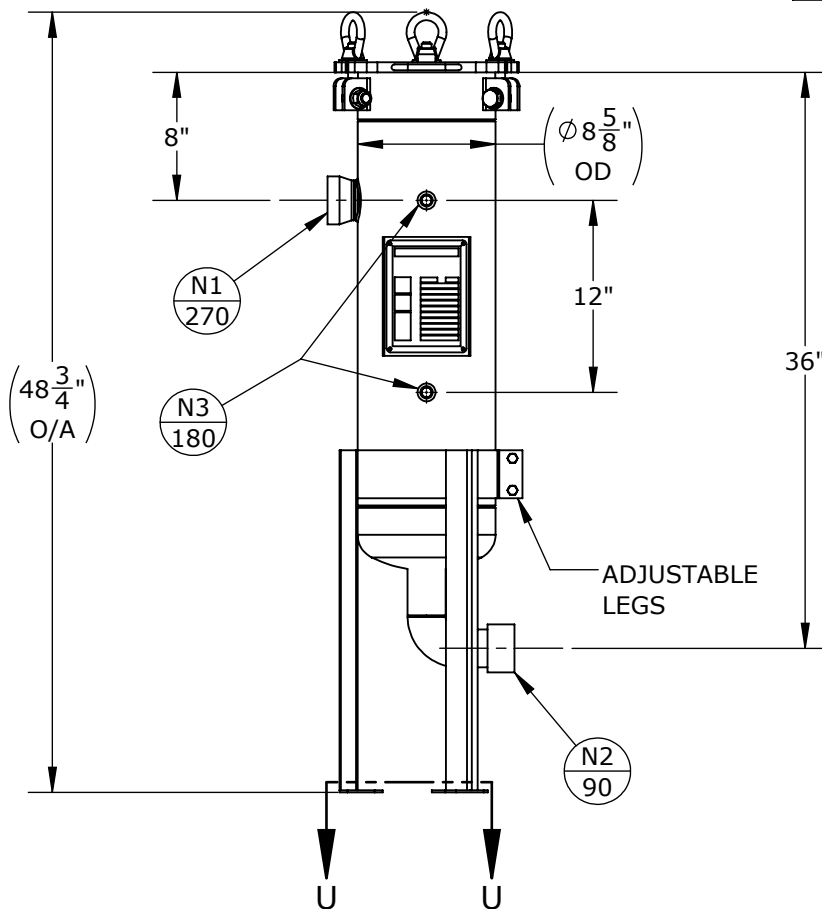
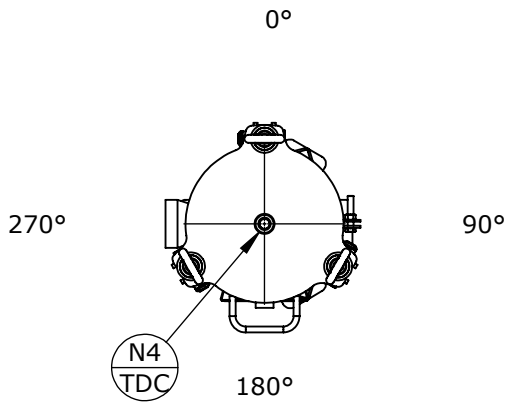



SECTION U-U  
SCALE 1 : 12

#### NOZZLE SCHEDULE

| MARK | QTY | SIZE / RATING   | DESCRIPTION    |
|------|-----|-----------------|----------------|
| N1   | 1   | 2" NPT CL3000   | INLET          |
| N2   | 1   | 2" NPT CL3000   | OUTLET         |
| N3   | 2   | 1/2" NPT CL3000 | PRESSURE GAUGE |
| N4   | 1   | 1/2" NPT CL3000 | VENT           |
| N5   | 1   | 1/2" NPT CL3000 | CLEAN DRAIN    |
| N6   | 0   |                 | DIRTY DRAIN    |

#### VESSEL DESIGN CONDITIONS

|                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| CODE: ASME SECTION VIII DIV. 1, 2019 EDITION                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                    |
| M.A.W.P.: 150 PSI @ 400°F                                                                                                                                                                                                                                                                                                                                                                                                                           | M.D.M.T.: -20°F @ 150 PSI                                                                          |
| M.A.W.P.: FV PSI @ 400°F                                                                                                                                                                                                                                                                                                                                                                                                                            | HYDROTEST PRESS: 195 PSI                                                                           |
| CORROSION ALLOWANCE: N/A                                                                                                                                                                                                                                                                                                                                                                                                                            | SERVICE: UNK. LIQUID, NON-LETHAL                                                                   |
| STAMP: UM                                                                                                                                                                                                                                                                                                                                                                                                                                           | RADIOGRAPHY: N/A                                                                                   |
| PWHT: N/A                                                                                                                                                                                                                                                                                                                                                                                                                                           | GASKET: <input type="checkbox"/> BUNA <input type="checkbox"/> VITON <input type="checkbox"/> EPDM |
| MATERIAL: SS316                                                                                                                                                                                                                                                                                                                                                                                                                                     | <input type="checkbox"/> OTHER: _____                                                              |
| <b>NOTES:</b><br>DRY WEIGHT: 110 LBS<br>SHIPPING WEIGHT: 140 LBS<br>VOLUME: 0.75 CU. FT.<br>INTERNALS: 1 X SIZE 1 BAKSET                                                                                                                                                                                                                                                                                                                            |                                                                                                    |
| <b>FACTORY INSTALLED OPTIONS:</b><br><input type="checkbox"/> STAINLESS STEEL BOLTING (SS316)<br><input type="checkbox"/> MESH LINED BASKETS: _____ MESH<br><input type="checkbox"/> N3 DIFFERENTIAL PRESSURE GAUGE TYPE: _____<br><input type="checkbox"/> N4 PRESSURE RELIEF VALVE TYPE: _____<br><input type="checkbox"/> N4 AIR ELIMINATOR TYPE: _____<br><input type="checkbox"/> N4 VENT VALVE<br><input type="checkbox"/> N5/N6 DRAIN VALVES |                                                                                                    |

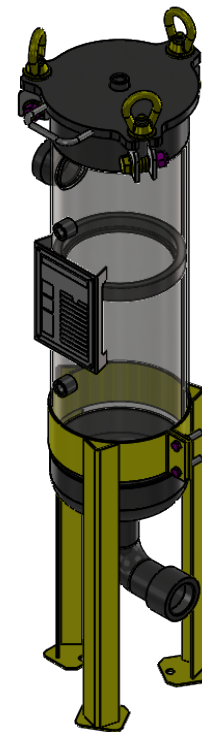

APPROVED WITH MARK-UPS ☐ APPROVED ☐



THIRD ANGLE  
PROJECTION  
TOLERANCES-UNLESS  
OTHERWISE NOTED  
DECIMAL .X = ±.1"  
.XX = ±.02"  
.XXX = ±.005"  
FRACTIONAL .XXX = ±.1/8"  
ANGULAR = ± 1°  
MAX. MACHINED  
SURFACE FINISH 125/



#### FIL-TREK CORPORATION

55 Stafford Court  
Cambridge, Ontario  
N1T 1B3  
Canada

Phone: (519) 623-7448  
Fax: (519) 623-8807  
Email: info@fil-trek.com  
Website: www.fil-trek.com

THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION

EQUIPMENT: SL SERIES (BAG FILTER HOUSING)

MODEL NO: S6SL111-2P-E-150

CUSTOMER:

VESSEL  
QUANTITY:

DRAWN: CL  
CHK'D: AJ

DATE:  
2020-03-05  
SCALE: NTS

SERIAL No.

Part No.  
002002-00663

REV. No.  
0