




DYNADEP SERIES

Reverse Flow Depth Gas Coalescers

- Absolute Rated
- 0.3 Micron
- Inside to Outside Flow Path

An excellent 0.3 micron coalescer that services a variety of fluids in air and gas applications.

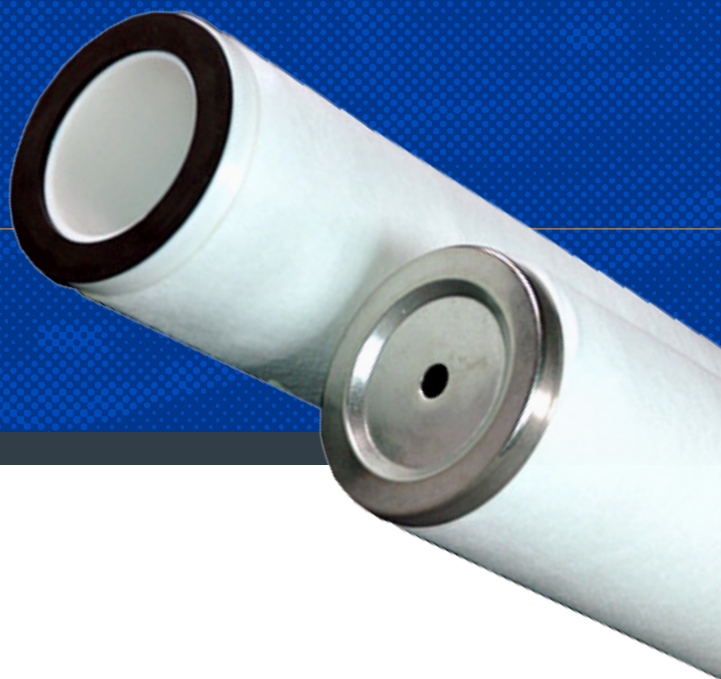

SUITABLE USES



Air & Gas



Oil & Gas


MEDIA	Polyester or polypropylene
EFFICIENCY	99.98%
SIZING	Available in 312, 324 and 336 sizes <i>Additional sizes available, please contact Fil-Trek</i>
COMPATIBLE HOUSINGS	77V
ADDITIONAL FEATURES	Comparable to Peco DynaCeptor NGGC and PZC saturated depth coalescers Available in both DOE and SOE configurations

For more information, e-mail:
info@fil-trek.com or visit Fil-Trek.com

DYNADEP SERIES

Reverse Flow Depth Gas Coalescers

- Absolute Rated
- 0.3 Micron
- Inside to Outside Flow Path



ELEMENT SPECIFICATIONS

MAX. DIFFERENTIAL PRESSURE	75 PSID
REC. CHANGE OUT PRESSURE	15 PSID
MAX. OPERATING TEMPERATURE	240°F (115.5°C)
MICRON RATINGS	0.3

MATERIALS AVAILABLE

Media	Polyester or polypropylene
Support Structure	Polyester or polypropylene
Core	Steel
End Caps	Steel
Gaskets	Buna-N (std) Viton
FILTER CONFIGURATION	DOE (std) SOE w/ bolt hole

DIMENSIONAL DETAILS

MODEL	OD	ID	LENGTH
DD-312	4.5"	3.1"	12"
DD-324	4.5"	3.1"	24"
DD-336	4.5"	3.1"	36"

Additional sizes available, please contact Fil-Trek.

COMPATIBLE HOUSINGS

77V GAS COALESCER HOUSINGS

Ideal for the removal of solid contaminants and aerosol mists from gas streams 0.3 micron and larger. Built to ASME code, 6" to 36" diameter and pressures up to 1480 PSI.

 [Click to view 77V Series](#)



PRODUCT NOMENCLATURE

DD	336	PE	VI	
MODEL	SIZE	MEDIA	GASKET	MISC OPTIONS
DynaDep Series	312 324 336	PE - Polyester PO - Polyester	Blank - Buna-N (std) VI - Viton	CE - SOE w/ bolt hole