




FIBERLOC SERIES

Reverse Flow Depth Microglass Coalescers

- 0.3 Micron, Absolute Rated
- Microglass
- Inside to Outside Flow Path

Ideal for the removal of sub-micron particulate and aerosolized liquid from air and gas streams.

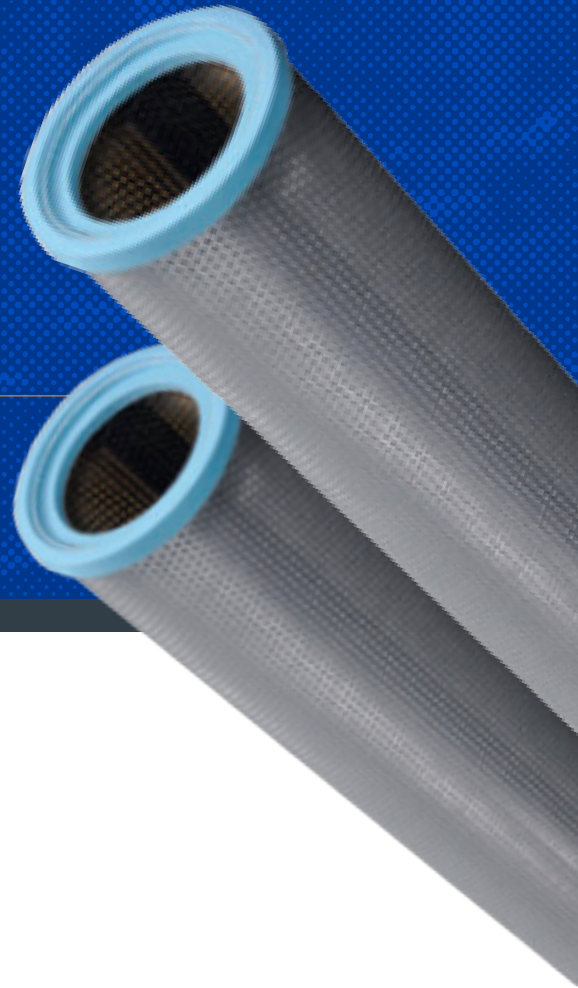

SUITABLE USES



Air & Gas



Oil & Gas


MEDIA	Microglass
EFFICIENCY	98.5% or 99.97%
SIZING	Available in 12, 24, 36, 312, 324, 336 and 540 sizes <i>Additional sizes may be available, please contact Fil-Trek.</i>
COMPATIBLE HOUSINGS	77V
ADDITIONAL FEATURES	Comparable to Peco FibrCeptor FF microglass coalescers. Ideal for continuous light oil or condensate removal.

For more information, e-mail:
info@fil-trek.com or visit Fil-Trek.com

FIBERLOC SERIES


Reverse Flow Depth Microglass Coalescers

- 0.3 Micron, Absolute Rated
- Microglass
- Inside to Outside Flow Path



ELEMENT SPECIFICATIONS

MAX. DIFFERENTIAL PRESSURE	100 PSID
REC. CHANGE OUT PRESSURE	8 PSID
MAX. OPERATING TEMPERATURE	350°F (176.7°C)
MICRON RATINGS	0.3
MATERIALS AVAILABLE	
Coalescing Media	Microglass
Drain Layer	Fiberglass
Support Media, Core	Steel
End Caps	Molded Silicone <i>Not recommended in H2S service > 5%</i> Steel
Gaskets*	Buna-N EPDM Viton <i>*For use with steel end caps</i>
FILTER CONFIGURATION	Double Open End

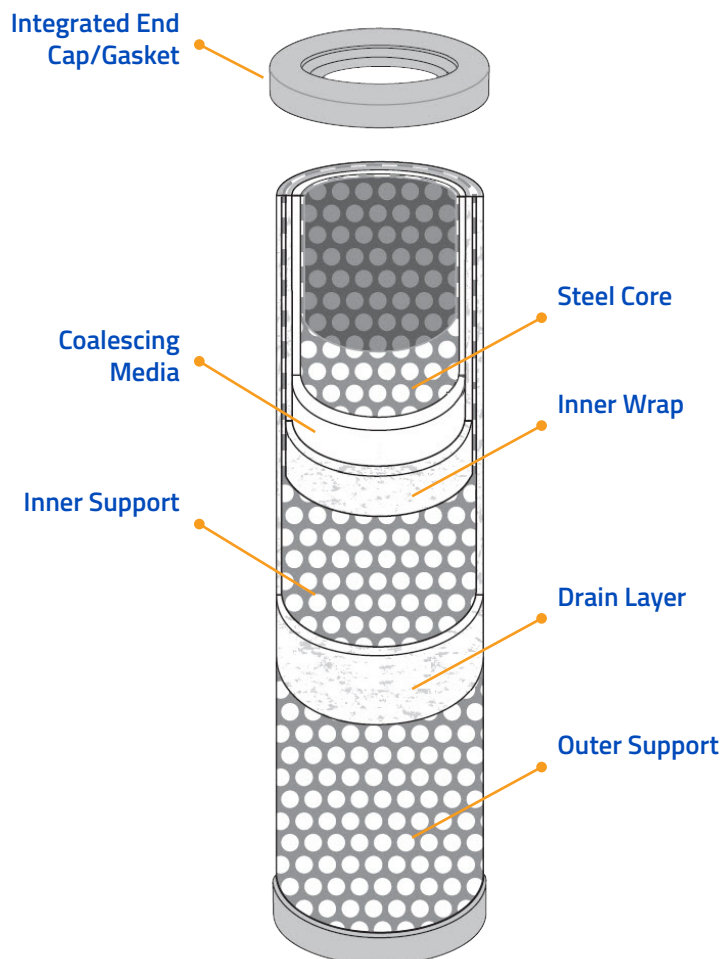

COMPATIBLE HOUSINGS

77V GAS COALESCER HOUSINGS

Ideal for the removal of solid contaminants and aerosol mists from gas streams 0.3 micron and larger. Built to ASME code, 6" to 36" diameter and pressures up to 1480 PSI.


[Click to view 77V Series](#)




FIBERLOC SERIES

Reverse Flow Depth Microglass Coalescers

- 0.3 Micron, Absolute Rated
- Microglass
- Inside to Outside Flow Path



FLOW CHART

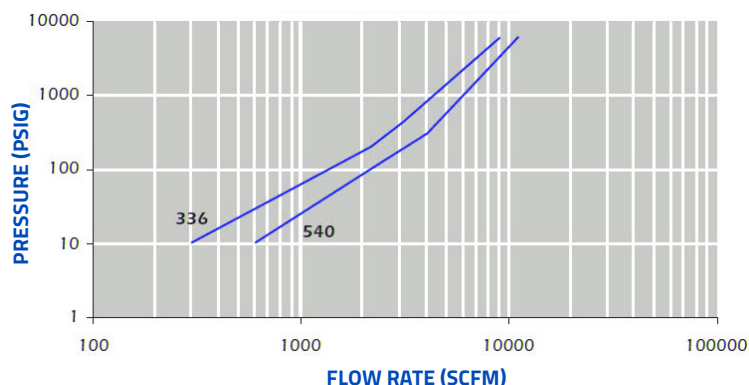

DIMENSIONAL DETAILS

MODEL	OD	ID	LENGTH
FL-12	3.5"	2"	12"
FL-24	3.5"	2"	24"
FL-312	4.5"	3"	12"
FL-324	4.5"	3"	24"
FL-336	4.5"	3"	36"
FL-540	6.1"	4.4"	40"

Additional sizes may be available, please contact Fil-Trek.

PRODUCT NOMENCLATURE

FL	336	A	BN	SS
MODEL	SIZE	MICRON	GASKET	OPTIONS
FiberLoc Series	12 24 312 324 336 540	Blank - 0.3 @ 98.5% A - 0.3 @ 99.97%	Blank - Silicone end caps BN - Buna-N EP - EPDM VI - Viton <i>*Buna and Viton gaskets use steel end caps</i>	SS - SS hardware