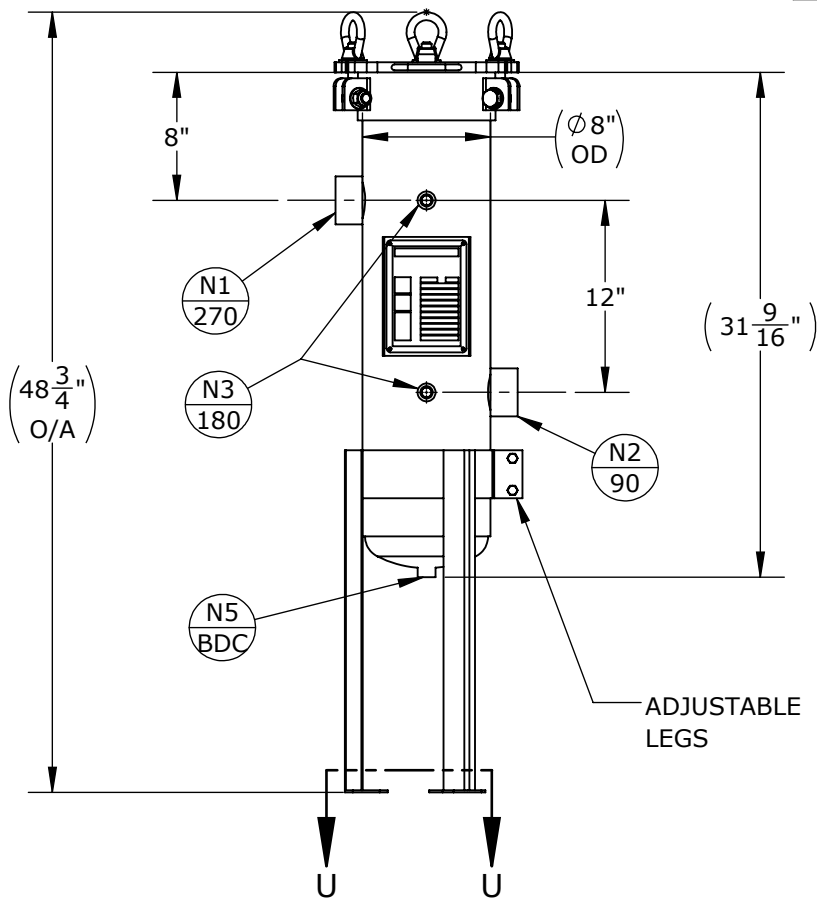
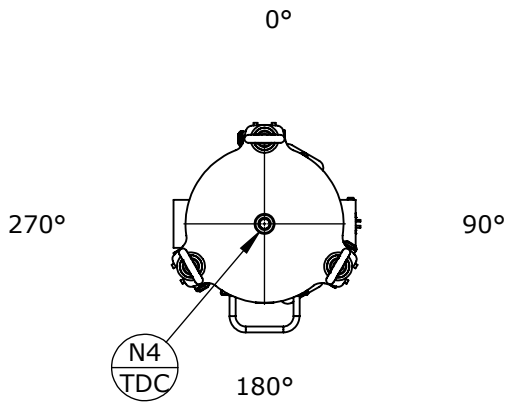


SECTION U-U
SCALE 1 : 12

NOZZLE SCHEDULE


MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" NPT CL3000	INLET
N2	1	2" NPT CL3000	OUTLET
N3	2	1/2" NPT CL3000	PRESSURE GAUGE
N4	1	1/2" NPT CL3000	VENT
N5	1	1/2" NPT CL3000	CLEAN DRAIN
N6	0		DIRTY DRAIN

VESSEL DESIGN CONDITIONS

CODE:	BEST COMMERCIAL PRACTICE		
M.A.W.P.:	150 PSI @ 400°F	M.D.M.T.:	-20°F @ 150 PSI
M.A.W.P.:	FV PSI @ 400°F	HYDROTEST PRESS:	195 PSI
CORROSION ALLOWANCE:	N/A	SERVICE:	UNK. LIQUID, NON-LETHAL
STAMP:	N/A	RADIOGRAPHY:	N/A
PWHT:	N/A	GASKET:	☐ BUNA ☐ VITON ☐ EPDM
MATERIAL:	CS	☐ OTHER:	

NOTES:
 DRY WEIGHT: 110 LBS
 SHIPPING WEIGHT: 140 LBS
 VOLUME: 0.75 CU. FT.
 INTERNALS: 1 X SIZE 1 BAKSET

FACTORY INSTALLED OPTIONS:
☐ STAINLESS STEEL BOLTING (SS316)
☐ N3 DIFFERENTIAL PRESSURE GAUGE
 TYPE: _____
☐ N4 PRESSURE RELIEF VALVE
 TYPE: _____
☐ N4 AIR ELIMINATOR
 TYPE: _____
☐ N4 VENT VALVE
☐ N5/N6 DRAIN VALVES

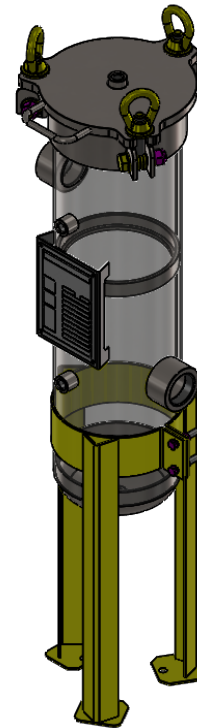

APPROVED WITH MARK-UPS ☐ APPROVED ☐



THIRD ANGLE
PROJECTION
 TOLERANCES-UNLESS
OTHERWISE NOTED
 DECIMAL .X = ±.1"
 .XX = ±.02"
 .XXX = ±.005"
 FRACTIONAL .XX = ±1/8"
 ANGULAR = ± 1°
 MAX. MACHINED
SURFACE FINISH 125/√



FIL-TREK CORPORATION

55 Stafford Court
 Cambridge, Ontario
 N1T 1B3
 Canada

Phone: (519) 623-7448
 Fax: (519) 623-8807
 Email: info@fil-trek.com
 Website: www.fil-trek.com

THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED
 IN ANY WAY DETRIMENTAL TO THE CORPORATION

EQUIPMENT: ESL SERIES (BAG FILTER VESSEL)

MODEL NO: ESL111-2P-A-150

CUSTOMER:

VESSEL
QUANTITY:

DRAWN: CL
 CHK'D: AJ

DATE:
2020-03-05
 SCALE: NTS

SERIAL No.

Part No.
002001-00124

REV. No.
0