

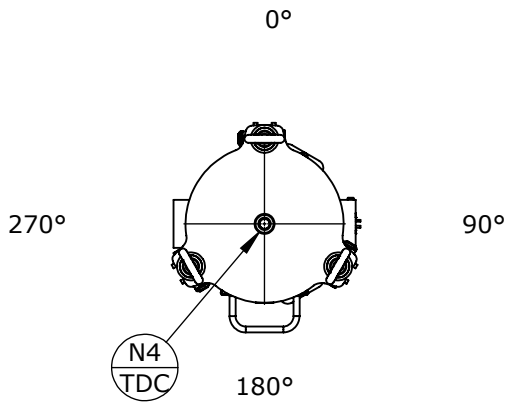
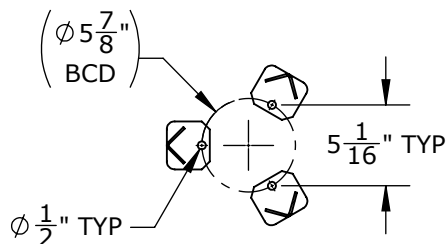


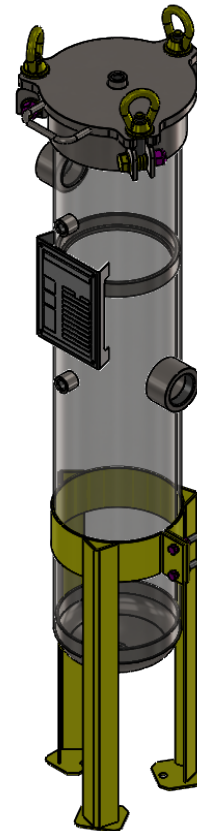


NOZZLE SCHEDULE			
MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" NPT CL3000	INLET
N2	1	2" NPT CL3000	OUTLET
N3	2	1/2" NPT CL3000	PRESSURE GAUGE
N4	1	1/2" NPT CL3000	VENT
N5	1	1/2" NPT CL3000	CLEAN DRAIN
VESSEL DESIGN CONDITIONS			
CODE: BEST COMMERCIAL PRACTICE			
M.A.W.P.: 150 PSI @ 400°F		M.D.M.T.: -20°F @ 150 PSI	
M.A.W.P.: FV PSI @ 400°F		HYDROTEST PRESS: 195 PSI	
CORROSION ALLOWANCE: N/A		SERVICE: UNK. LIQUID, NON-LETHAL	
STAMP: N/A		RADIOGRAPHY: N/A	
PWHT: N/A		GASKET: ☐ BUNA ☐ VITON ☐ EPDM	
MATERIAL: SS316		☐ OTHER: _____	
NOTES:		FACTORY INSTALLED OPTIONS:	
DRY WEIGHT: 140 LBS		☐ STAINLESS STEEL BOLTING (SS316)	
SHIPPING WEIGHT: 170 LBS		☐ N3 DIFFERENTIAL PRESSURE GAUGE	
VOLUME: 1 CU. FT.		TYPE: _____	
INTERNALS: 1 X SIZE 2 BASKET		☐ N4 PRESSURE RELIEF VALVE	
		TYPE: _____	
		☐ N4 AIR ELIMINATOR	
		TYPE: _____	
		☐ N4 VENT VALVE	
		☐ N5/N6 DRAIN VALVES	

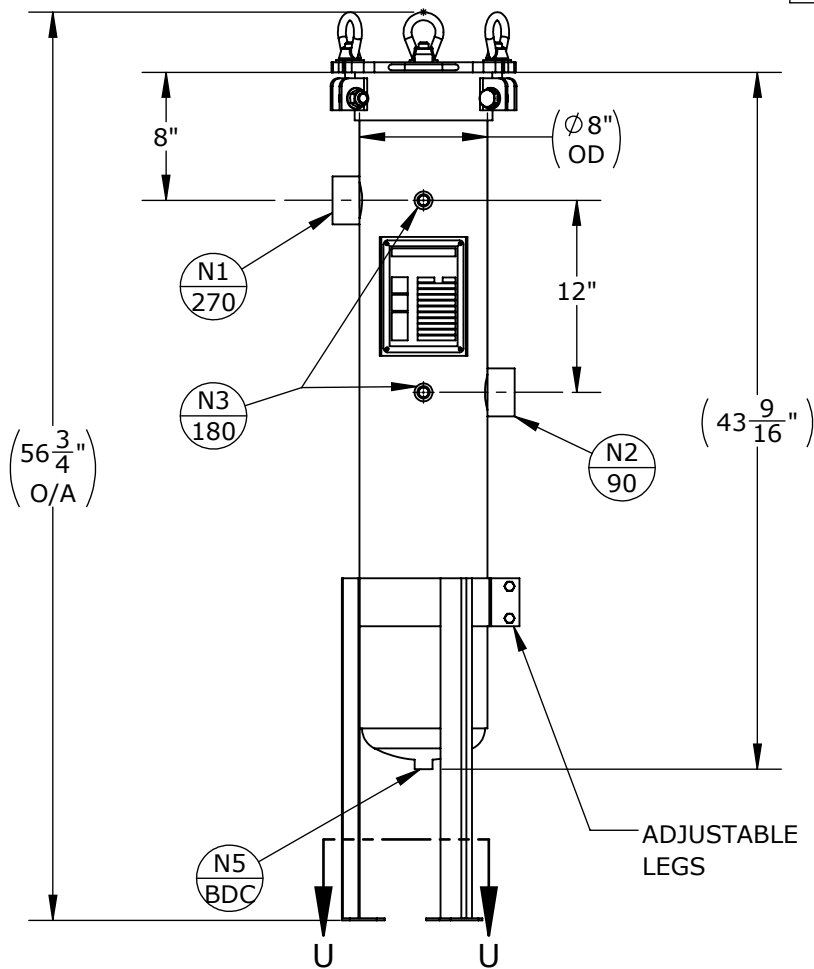

SECTION U-U
SCALE 1 : 12

APPROVED WITH MARK-UPS ☐ APPROVED ☐



		FIL-TREK CORPORATION	
Fil-Trek		55 Stafford Court Cambridge, Ontario N1T 1B3 Canada	Phone: (519) 623-7448 Fax: (519) 623-8807 Email: info@fil-trek.com Website: www.fil-trek.com
THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION			
EQUIPMENT:		SL SERIES (BAG FILTER VESSEL)	
MODEL NO:		S6ESL112-2P-A-150	
CUSTOMER:			
DRAWN: CL	DATE: 2020-03-05	SERIAL No.	Part No. 002001-00180
CHK'D: AJ	SCALE: NTS		REV. No. 0