

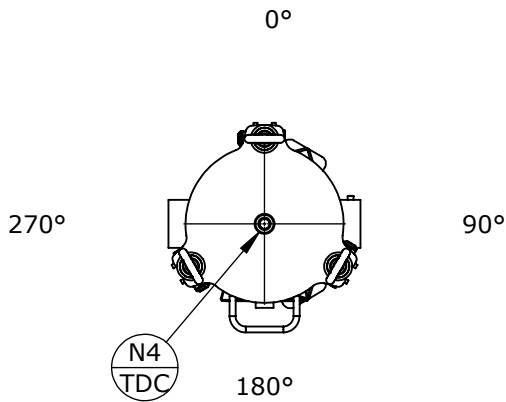
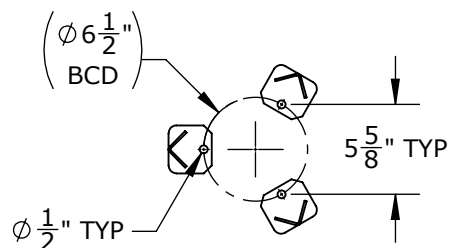


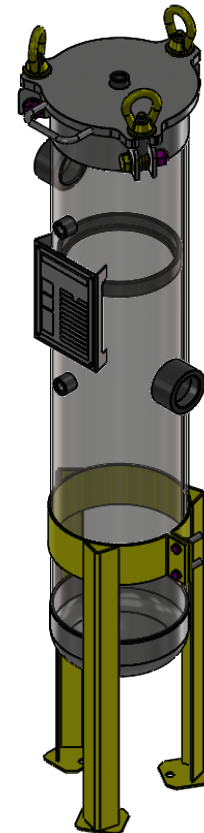

NOZZLE SCHEDULE			
MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" NPT CL3000	INLET
N2	1	2" NPT CL3000	OUTLET
N3	2	1/2" NPT CL3000	PRESSURE GAUGE
N4	1	1/2" NPT CL3000	VENT
N5	1	1/2" NPT CL3000	CLEAN DRAIN
VESSEL DESIGN CONDITIONS			
CODE: BEST COMMERCIAL PRACTICE			
M.A.W.P.: 270 PSI @ 100°F		M.D.M.T.: -20°F @ 270 PSI	
M.A.W.P.: FV PSI @ 100°F		HYDROTEST PRESS: 351 PSI	
CORROSION ALLOWANCE: N/A		SERVICE: UNK. LIQUID, NON-LETHAL	
STAMP: N/A		RADIOGRAPHY: N/A	
PWHT: N/A		GASKET: ☐ BUNA ☐ VITON ☐ EPDM	
MATERIAL: SS304		☐ OTHER: _____	
NOTES:		FACTORY INSTALLED OPTIONS:	
DRY WEIGHT: 140 LBS		☐ STAINLESS STEEL BOLTING (SS316)	
SHIPPING WEIGHT: 170 LBS		☐ N3 DIFFERENTIAL PRESSURE GAUGE	
VOLUME: 1 CU. FT.		TYPE: _____	
INTERNALS: 1 X SIZE 2 BASKET		☐ N4 PRESSURE RELIEF VALVE	
		TYPE: _____	
		☐ N4 AIR ELIMINATOR	
		TYPE: _____	
		☐ N4 VENT VALVE	
		☐ N5/N6 DRAIN VALVES	

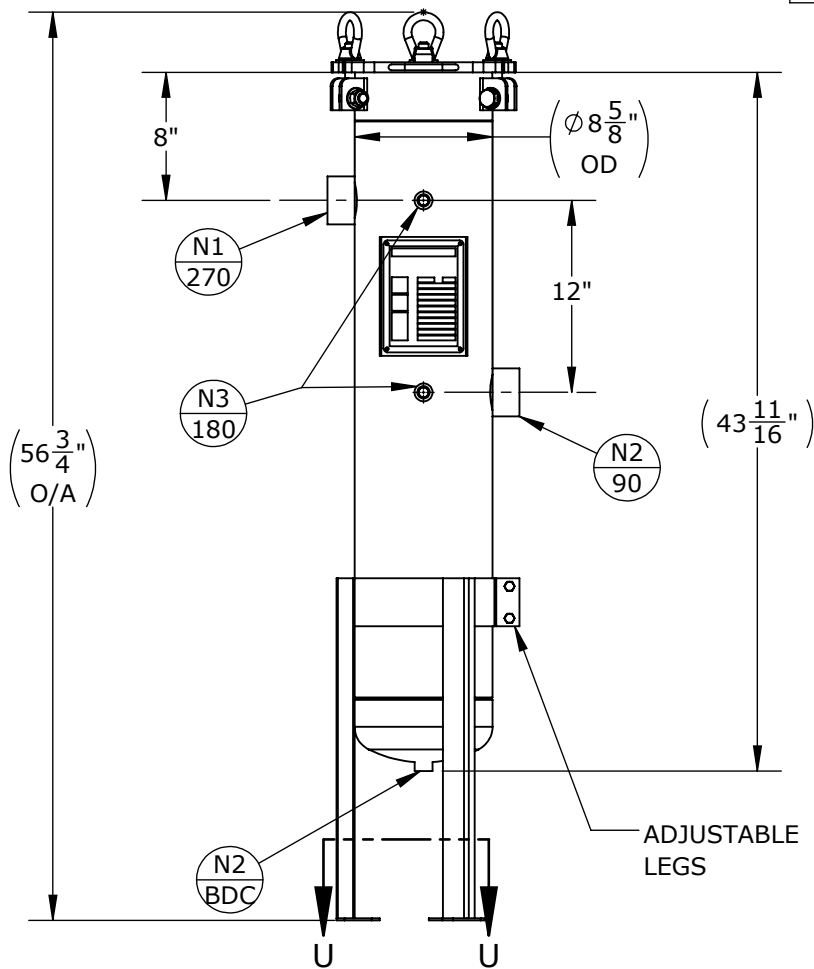

SECTION U-U
SCALE 1 : 12

APPROVED WITH MARK-UPS ☐ APPROVED ☐



THIRD ANGLE
PROJECTION
TOLERANCES-UNLESS
OTHERWISE NOTED
DECIMAL .X = ±.1"
.XX = ±.02"
.XXX = ±.005"
FRACTIONAL .XXX = ±.005"
ANGULAR = ± 1°
MAX. MACHINED
SURFACE FINISH 125/√



FIL-TREK CORPORATION

55 Stafford Court
Cambridge, Ontario
N1T 1B3
Canada

Phone: (519) 623-7448
Fax: (519) 623-8807
Email: info@fil-trek.com
Website: www.fil-trek.com

THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION

EQUIPMENT: SL SERIES (BAG FILTER VESSEL)

MODEL NO: S4ESL112-2P-A-270

CUSTOMER:

DRAWN: CL

DATE: 2020-03-05

SERIAL No.

Part No. 002001-00287

REV. No. 0

VESSEL
QUANTITY:

CHK'D: AJ

SCALE: NTS