
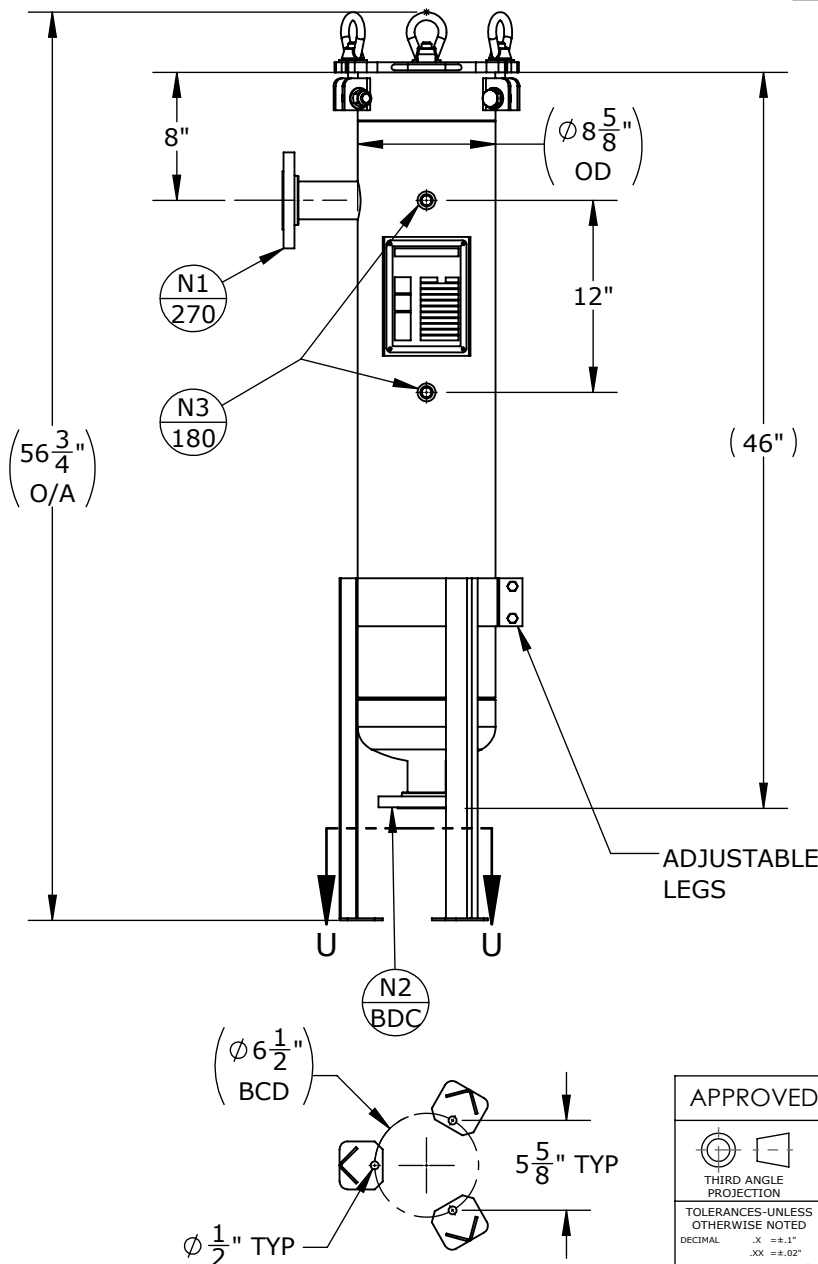


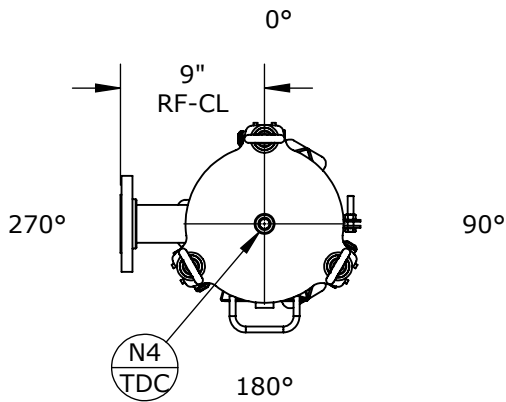

SECTION U-U
SCALE 1 : 12

NOZZLE SCHEDULE

MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" RF SO CL150	INLET
N2	1	2" RF SO CL150	OUTLET
N3	2	1/2" NPT CL3000	PRESSURE GAUGE
N4	1	1/2" NPT CL3000	VENT
N5	1	1/2" NPT CL3000	CLEAN DRAIN
N6	0		DIRTY DRAIN

VESSEL DESIGN CONDITIONS


CODE:	BEST COMMERCIAL PRACTICE		
M.A.W.P.:	270 PSI @ 100°F	M.D.M.T.:	-20°F @ 270 PSI
M.A.W.P.:	FV PSI @ 100°F	HYDROTEST PRESS:	351 PSI
CORROSION ALLOWANCE:	N/A	SERVICE:	UNK. LIQUID, NON-LETHAL
STAMP:	N/A	RADIOGRAPHY:	N/A
PWHT:	N/A	GASKET:	☐ BUNA ☐ VITON ☐ EPDM
MATERIAL:	SS304		☐ OTHER:

NOTES:

DRY WEIGHT: 150 LBS
SHIPPING WEIGHT: 180 LBS
VOLUME: 1 CU. FT.
INTERNALS: 1 X SIZE 2 BAKSET

FACTORY INSTALLED OPTIONS:

- ☐ STAINLESS STEEL BOLTING (SS316)
☐ N3 DIFFERENTIAL PRESSURE GAUGE TYPE: _____
☐ N4 PRESSURE RELIEF VALVE TYPE: _____
☐ N4 AIR ELIMINATOR TYPE: _____
☐ N4 VENT VALVE
☐ N5/N6 DRAIN VALVES

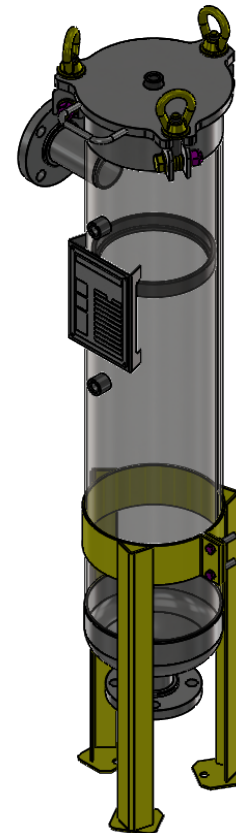

APPROVED WITH MARK-UPS ☐ APPROVED ☐



THIRD ANGLE PROJECTION
TOLERANCES-UNLESS OTHERWISE NOTED
DECIMAL .X = ±.1"
.XX = ±.02"
.XXX = ±.005"
FRACTIONAL .XXX = ±.005"
ANGULAR = ± 1°
MAX. MACHINED SURFACE FINISH 125/√



FIL-TREK CORPORATION

55 Stafford Court
Cambridge, Ontario
N1T 1B3
Canada

Phone: (519) 623-7448
Fax: (519) 623-8807
Email: info@fil-trek.com
Website: www.fil-trek.com

THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION

EQUIPMENT: ESL SERIES (BAG FILTER VESSEL)

MODEL NO: S4ESL112-2F-C-270

CUSTOMER:

VESSEL QUANTITY:

DRAWN: CL
CHK'D: AJ

DATE: 2020-03-05
SCALE: NTS

SERIAL No.

Part No. 002001-00299

REV. No. 0