

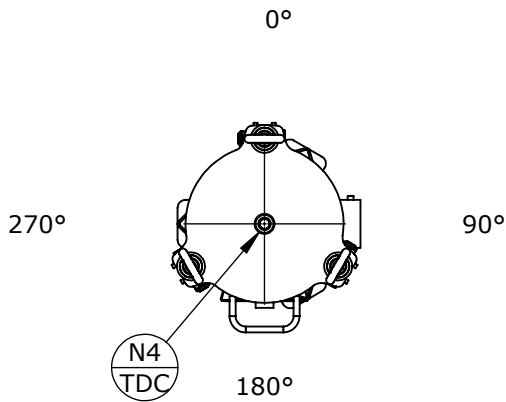
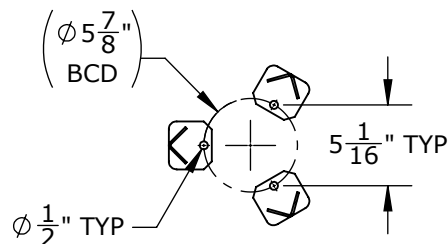


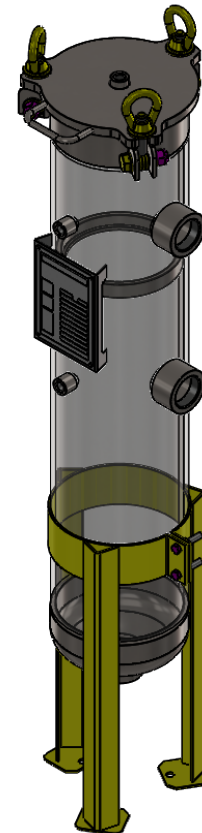

NOZZLE SCHEDULE			
MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" NPT CL3000	INLET
N2	1	2" NPT CL3000	OUTLET
N3	2	1/2" NPT CL3000	PRESSURE GAUGE
N4	1	1/2" NPT CL3000	VENT
N5	1	2" NPT CL3000	CLEAN DRAIN
N6	0		DIRTY DRAIN

VESSEL DESIGN CONDITIONS	
CODE: BEST COMMERCIAL PRACTICE	
M.A.W.P.: 150 PSI @ 400°F	M.D.M.T.: -20°F @ 150 PSI
M.A.W.P.: FV PSI @ 400°F	HYDROTEST PRESS: 195 PSI
CORROSION ALLOWANCE: N/A	SERVICE: UNK. LIQUID, NON-LETHAL
STAMP: N/A	RADIOGRAPHY: N/A
PWHT: N/A	GASKET: ☐ BUNA ☐ VITON ☐ EPDM
MATERIAL: SS304	☐ OTHER: _____

NOTES: DRY WEIGHT: 140 LBS SHIPPING WEIGHT: 170 LBS VOLUME: 1 CU. FT. INTERNALS: 1 X SIZE 2 BAKSET	FACTORY INSTALLED OPTIONS: ☐ STAINLESS STEEL BOLTING (SS316) ☐ N3 DIFFERENTIAL PRESSURE GAUGE TYPE: _____ ☐ N4 PRESSURE RELIEF VALVE TYPE: _____ ☐ N4 AIR ELIMINATOR TYPE: _____ ☐ N4 VENT VALVE ☐ N5/N6 DRAIN VALVES
---	--

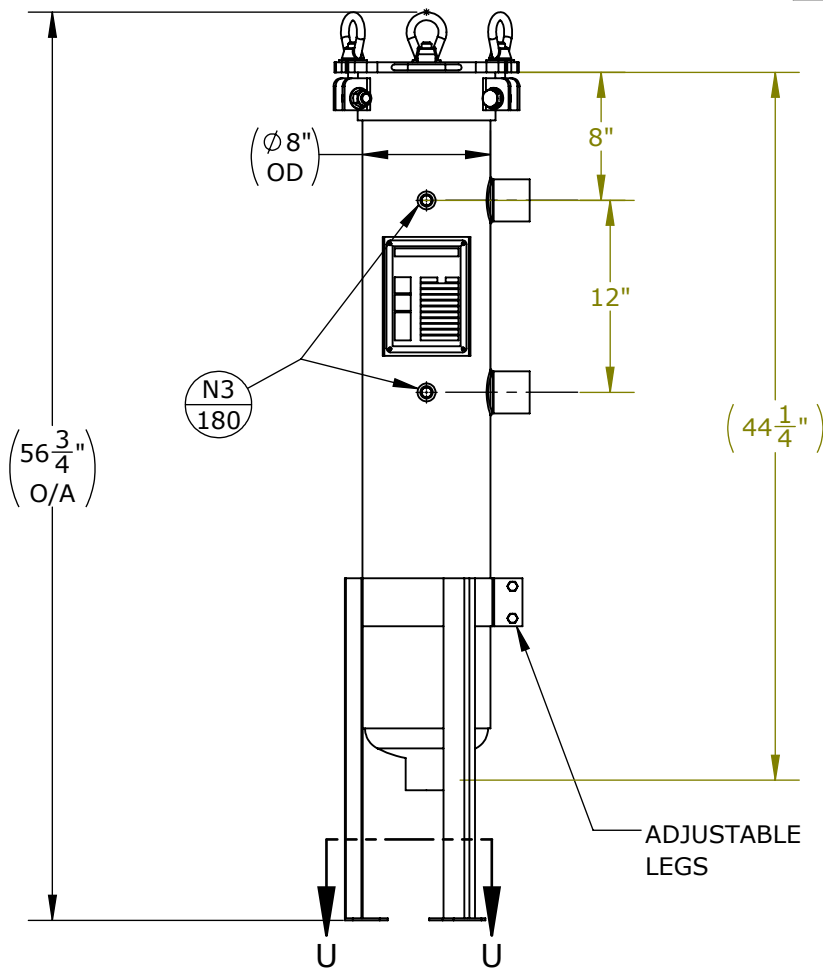

SECTION U-U
SCALE 1 : 12

APPROVED WITH MARK-UPS ☐ APPROVED ☐



THIRD ANGLE
PROJECTION
TOLERANCES-UNLESS
OTHERWISE NOTED
DECIMAL .X = ±.1"
.XX = ±.02"
.XXX = ±.005"
FRACTIONAL .XXX = ±.005"
ANGULAR = ± 1°
MAX. MACHINED
SURFACE FINISH 125/√



FIL-TREK CORPORATION

55 Stafford Court
Cambridge, Ontario
N1T 1B3
Canada

Phone: (519) 623-7448
Fax: (519) 623-8807
Email: info@fil-trek.com
Website: www.fil-trek.com

THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION

EQUIPMENT: ESL SERIES (BAG FILTER VESSEL)

MODEL NO: S4ESL112-2P-CDA-150

CUSTOMER:

VESSEL
QUANTITY:

DRAWN: CL
CHK'D: AJ

DATE:
2020-03-05
SCALE: NTS

SERIAL No.

Part No.
002001-00197

REV. No.
0