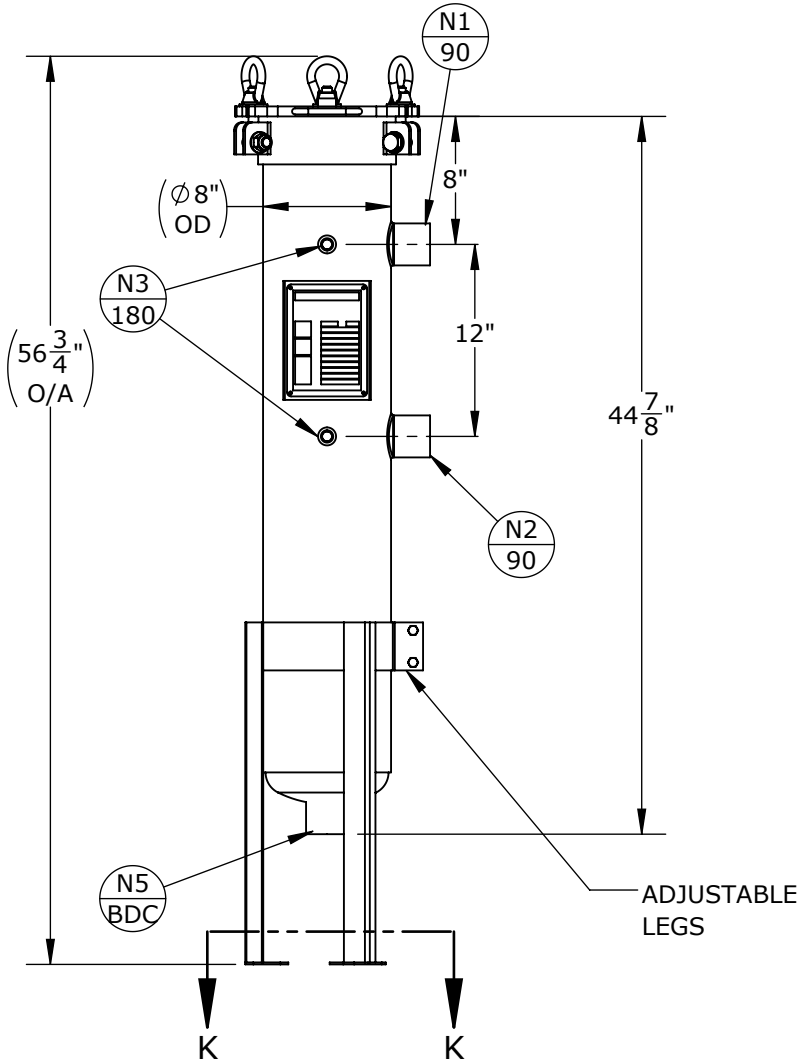
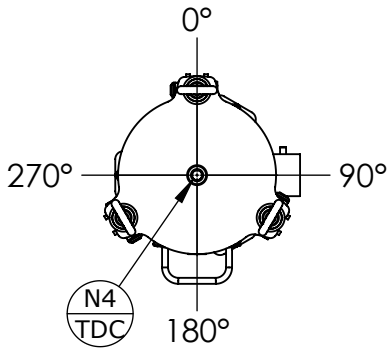



SECTION K-K

NOZZLE SCHEDULE

MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" NPT CL3000	INLET
N2	1	2" NPT CL3000	OUTLET
N3	2	1/2" NPT CL3000	PRESSURE GAUGE
N4	1	1/2" NPT CL3000	VENT
N5	1	2" NPT CL3000	CLEAN DRAIN
N6	1		DIRTY DRAIN

VESSEL DESIGN CONDITIONS

CODE: BEST COMMERCIAL PRACTICE	
M.A.W.P.: 150 PSI @ 400°F	M.D.M.T.: -20°F @ 150 PSI
M.A.W.P.: FV PSI @ 400°F	HYDROTEST PRESS: 195 PSI
CORROSION ALLOWANCE: N/A	SERVICE: UNK. LIQUID, NON-LETHAL
STAMP: N/A	RADIOGRAPHY: N/A
PWHT: N/A	GASKET: ☐ BUNA ☐ VITON ☐ EPDM
MATERIAL: SS316	☐ OTHER: _____
NOTES: DRY WEIGHT: 140 LBS SHIPPING WEIGHT: 170 LBS VOLUME: 1 CU. FT. INTERNALS: 1x SIZE 2 BASKETS	
FACTORY INSTALLED OPTIONS: ☐ STAINLESS STEEL BOLTING (SS316) ☐ MESH LINED BASKETS: _____ MESH ☐ N3 DIFFERENTIAL PRESSURE GAUGE TYPE: _____ ☐ N4 PRESSURE RELIEF VALVE TYPE: _____ ☐ N4 AIR ELIMINATOR TYPE: _____ ☐ N4 VENT VALVE ☐ N5/N6 DRAIN VALVES	

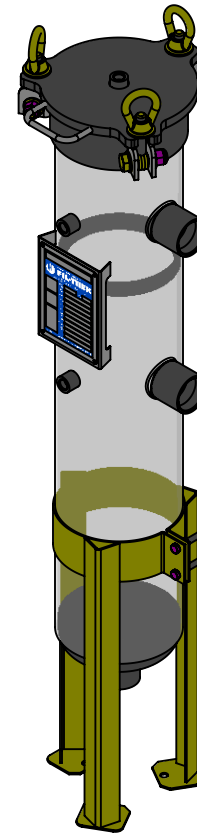

APPROVED WITH MARK-UPS

APPROVED



THIRD ANGLE PROJECTION
TOLERANCES-UNLESS OTHERWISE NOTED
DECIMAL .X = ±.1"
.XX = ±.02"
.XXX = ±.005"
FRACTIONAL .XX = ±1/8"
ANGULAR = ± 1°
MAX. MACHINED SURFACE FINISH 125/√



FIL-TREK CORPORATION

55 Stafford Court
Cambridge, Ontario
N1T 1B3
Canada

Phone: (519) 623-7448
Fax: (519) 623-8807
Email: info@fil-trek.com
Website: www.fil-trek.com

THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION

EQUIPMENT: BMB SERIES (BAG FILTER VESSEL)

MODEL NO: S6ESL112-2P-CDA-150

CUSTOMER:

VESSEL QUANTITY:

DRAWN: AJ

DATE: 11/27/2020

SERIAL No.

Part No. 002001-00198

REV. No.

0

CHK'D: RS

SCALE: NTS