



LM SERIES

Polished Single Cartridge Housing

- Single Cartridge Filter Housing
- Polished Stainless Steel 316

Multi-purpose Single Cartridge Filter Housing
available in a range of sizes.

SUITABLE USES



Air & Gas



Desalination



Coolant



Water



Electronics



Coatings



Oil & Gas



Chemical



Pulp & Paper



Power



Marine



Equipment

MEDIA

Accepts one (1) 10", 20", 30" or 40" cartridge
Housings accept industry standard double open or
222 end style cartridges

DESIGN PRESSURE

150psig (10.3bar) @ 250°F (121.1° C) design pressure

AVAILABLE MATERIALS

Vessels available stainless steel 316

ADDITIONAL FEATURES

Band clamp closure allows for quick element
change out



*Custom sizes, configurations, materials
of construction and other options may
be available. Please contact Fil-Trek*

*For more information, e-mail:
info@fil-trek.com or visit Fil-Trek.com*

LM SERIES

Polished Single Cartridge Housing

- Single Cartridge Filter Housing
- Polished Stainless Steel 316



HOUSING SPECIFICATIONS

INLET/OUTLET	1" NPT
DIRTY DRAIN	¼" NPT
CLEAN DRAIN	¼" NPT
VENT	¼" NPT
GAUGES	¼" NPT
ELEMENT SELECTION	E1 – Double Open End E4 – 222/Flat Single Open End E5 – 222/Fin Single Open End

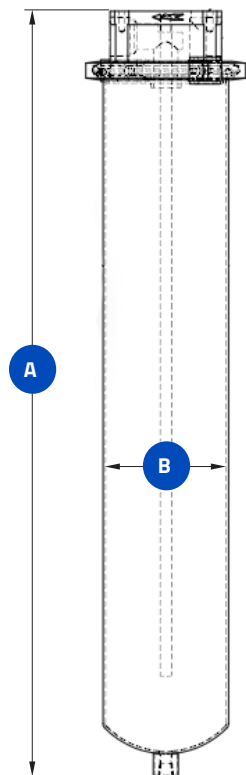


CHART LEGEND

- A** OVERALL HEIGHT
B BODY DIAMETER

MECHANICAL SPECIFICATIONS

MODEL	# OF 2.5" FILTERS	FLOW RATE-GPM (2.5" FILTERS)	MAX INLET/OUT-LET (IN)
S6LM01-1-1P	1	5	1"
S6LM01-2-1P	1	10	1"
S6LM01-3-1P	1	15	1"
S6LM01-4-1P	1	20	1"

MODEL DIMENSIONAL DETAILS

MODEL	SHIPPING WEIGHT (LBS)	OVERALL HEIGHT	OVERALL DIAMETER
S6LM01-1-1P	8	15 9/16"	4 3/16"
S6LM01-2-1P	12	25 9/16"	4 3/16"
S6LM01-3-1P	16	35 9/16"	4 3/16"
S6LM01-4-1P	20	45 9/16"	4 3/16"

PRODUCT NOMENCLATURE

S6	LM	01	4	1P
MATERIAL	MODEL	# OF CARTRIDGES	LENGTH OF CARTRIDGES	SIZE OF INLET / OUTLET
S6 – SS 316	LM - Non Code	01 - 1 Cartridge	10" 20" 30" 40"	1P - 1" NPT