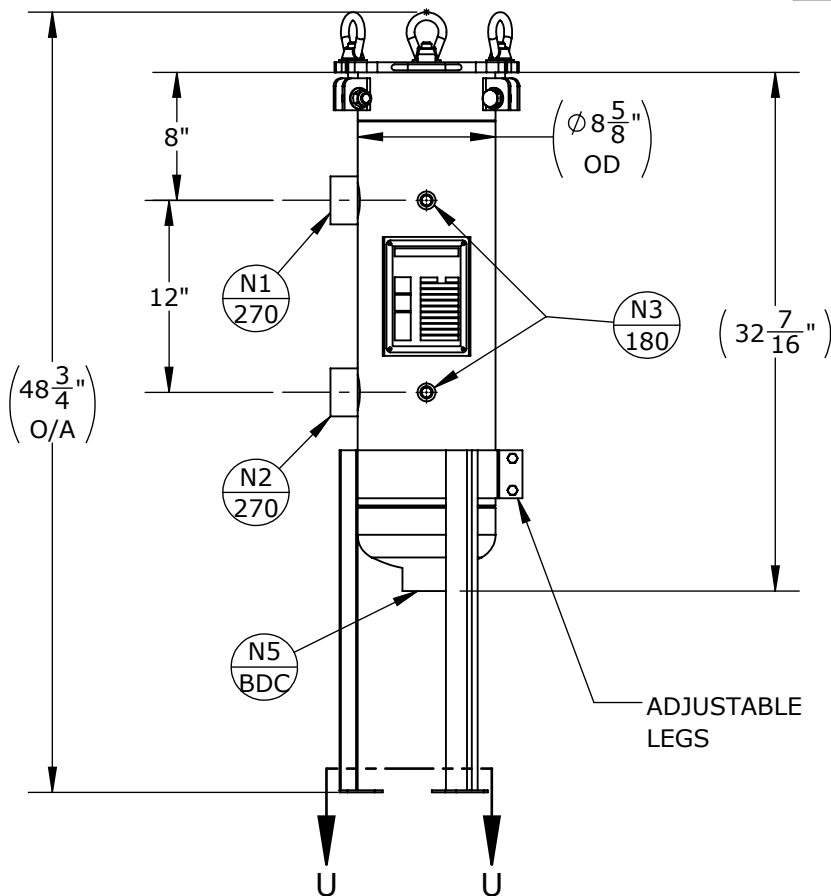
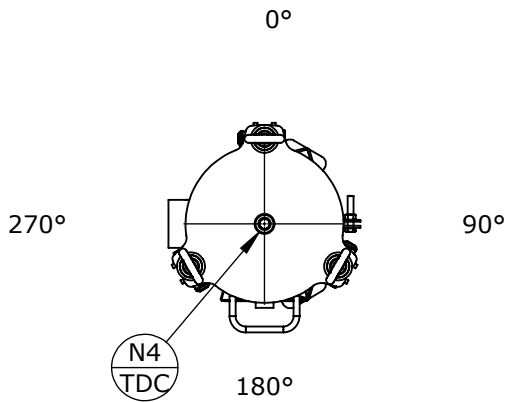


SECTION U-U
SCALE 1 : 12

NOZZLE SCHEDULE


MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" NPT CL3000	INLET
N2	1	2" NPT CL3000	OUTLET
N3	2	1/2" NPT CL3000	PRESSURE GAUGE
N4	1	1/2" NPT CL3000	VENT
N5	1	2" NPT CL3000	CLEAN DRAIN
N6	0		DIRTY DRAIN

VESSEL DESIGN CONDITIONS

CODE:	BEST COMMERCIAL PRACTICE
M.A.W.P.: 270 PSI @ 100°F	M.D.M.T.: -20°F @ 270 PSI
M.A.W.P.: FV PSI @ 100°F	HYDROTEST PRESS: 351 PSI
CORROSION ALLOWANCE: N/A	SERVICE: UNK. LIQUID, NON-LETHAL
STAMP: N/A	RADIOGRAPHY: N/A
PWHT: N/A	GASKET: ☐ BUNA ☐ VITON ☐ EPDM
MATERIAL: SS316	☐ OTHER:

NOTES:
 DRY WEIGHT: 110 LBS
 SHIPPING WEIGHT: 140 LBS
 VOLUME: 0.75 CU. FT.
 INTERNALS: 1 X SIZE 1 BAKSET

FACTORY INSTALLED OPTIONS:
☐ STAINLESS STEEL BOLTING (SS316)
☐ N3 DIFFERENTIAL PRESSURE GAUGE TYPE:
☐ N4 PRESSURE RELIEF VALVE TYPE:
☐ N4 AIR ELIMINATOR TYPE:
☐ N4 VENT VALVE
☐ N5/N6 DRAIN VALVES

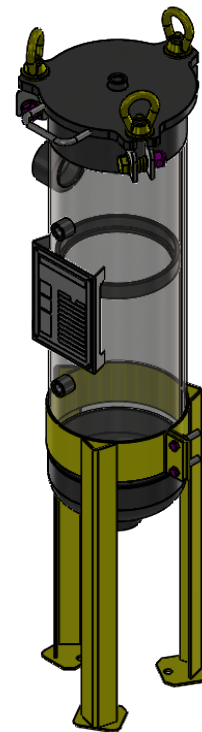

APPROVED WITH MARK-UPS ☐ APPROVED ☐



THIRD ANGLE PROJECTION
 TOLERANCES-UNLESS OTHERWISE NOTED
 DECIMAL .X = ±.1" .XX = ±.02" .XXX = ±.005"
 FRACTIONAL .XXX = ±.005"
 ANGULAR = ± 1°
 MAX. MACHINED SURFACE FINISH 125/



FIL-TREK CORPORATION

55 Stafford Court
 Cambridge, Ontario
 N1T 1B3
 Canada
 Phone: (519) 623-7448
 Fax: (519) 623-8807
 Email: info@fil-trek.com
 Website: www.fil-trek.com

THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION

EQUIPMENT: ESL SERIES (BAG FILTER VESSEL)

MODEL NO: S6ESL111-2P-CDB-270

CUSTOMER:

VESSEL QUANTITY:	DRAWN: CL	DATE: 2020-03-05	SERIAL No.	Part No. 002001-00255	REV. No. 0
	CHK'D: AJ	SCALE: NTS			