

SL SERIES

Single Bag Filter Housings

- Side Line Bag Filter Housing
- ASME Design/Industrial Design
- Universal

Economic multi-purpose, ASME code and non-code designed housings.

SUITABLE USES



MEDIA Accepts 1 single (P1) or double length (P2) bag filter.

CONFIGURATION Side in/bottom out.
*Other configurations available.**

DESIGN PRESSURE /TEMPERATURE 150psig (10.3bar) @ 400°F (204.4C)

AVAILABLE FINISHES Vessels available in carbon steel, stainless steel 304 or 316. Also available in LDX2101, C276, AL6XN, 2205, 2507 & Monel 400.

ADDITIONAL FEATURES Available in swing bolt closure design



Custom sizes, configurations, materials of construction and other options may be available. Please contact Fil-Trek

For drawings, flow charts, custom applications and filter cartridge information please visit www.fil-trek.com.

SL SERIES

Single Bag Filter Housings

- Side Line Bag Filter Housing
- ASME Design/Industrial Design
- Universal



HOUSING SPECIFICATIONS

Inlet/Outlet	2" Flange - 3" Flange 2" – 3" 150# NPT
Inlet/Outlet Connection Types	FNPT Flange Ferrules
Clean Drain	½" NPT
Vent	½" NPT
Gauges	½" NPT
Basket	⅛" on ⅜" perforated plate *Other basket options available
Certifications	U, UM, CE, NB, CRN


MODEL FLOW RATES

Model	Bag Size	Flow Rate (GPM)
SL111-2P	1	110
SL111-2F	1	110
SL111-3P	1	240
SL111-3F	1	240
SL112-2P	2	110
SL112-2F	2	110
SL112-3P	2	240
SL112-3F	2	240

Flow rates are based on water at 2psid through empty housing with basket. Actual flow rate is dependant on fluid viscosity, micron rating, and media type. For actual flow rates based on your process, please contact Fil-Trek Corporation.

MATERIAL OF CONSTRUCTION

Material of Construction	Max. Operating Pressure (psi @250°F)	Max. Design Temp
Carbon Steel	150 psi (10.3bar)	400°F (204.4°C)
304 Stainless Steel	150 psi (10.3bar)	400°F (204.4°C)
316 Stainless Steel	150 psi (10.3bar)	400°F (204.4°C)

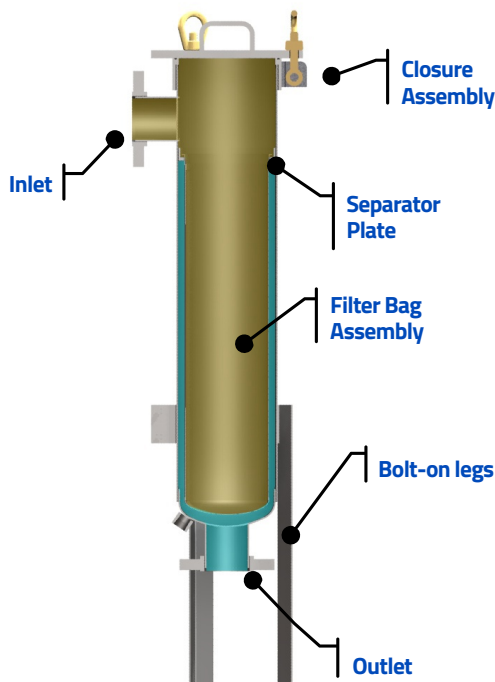

55 Stafford Court, Cambridge, ON N1T 1B3 P (519) 623-7448 F (519) 623-8807

For more information, e-mail: info@fil-trek.com or visit Fil-Trek.com

SL SERIES

Single Bag Filter Housings

- Side Line Bag Filter Housing
- ASME Design/Industrial Design
- Universal



HOUSING OPTIONS

*Indicates standard configuration

Configuration Options (-) – Side in/Bottom out*
A – Side in/side out
D – Side in/out Same Side

Basket Options (-) – 1/8" on 3/16" perforated basket*
MB ____ – Mesh lined basket
(insert mesh size in blank space)

Finish Options (-) – Paint "National Blue" (std for CS) *
(-) – Bead Blast (std for SS304/SS316) *
EP1 – Electro polish Inside/Outside
EP2 – Inside only
EP3 – Outside only
PP – Passivation

O-Ring Options (-) – Buna-N*
ED – EPDM
VI – Viton
SI – Silicone
TEV – Teflon encapsulated Viton

Accessories Direct Reading Gauge
DP Gauge
Safety Relief Valves
Vent Valves
Drain Valves
Air Eliminator
Omega Springs
Balloon/Liquid Displacer
Bag Magnets

MODEL DIMENSIONAL DETAILS

Model	Weight (lbs)	A	B	C
SL111-2P	65	21 1/8"	6"	37 9/16"
SL111-2F	65	21 1/8"	8"	37 9/16"
SL111-3P	65	21 1/8"	6"	37 9/16"
SL111-3F	65	21 1/8"	8"	37 9/16"
SL112-2P	75	34 7/8"	6"	50 3/4"
SL112-2F	75	34 7/8"	8"	50 3/4"
SL112-3P	75	34 7/8"	6"	50 3/4"
SL112-3F	75	34 7/8"	8"	50 3/4"

Dimensions above are based on standard configuration 'C', side in-bottom out. Contact factory for weights and dimensions for all other model configurations

CONFIGURATION OPTIONS

Style A
Side in/Side out

Style C
Side in/Bottom Out
SL Standard Design

Style D
Side in/Side Out
Same side



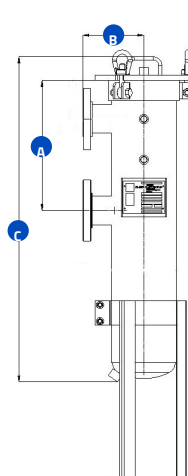


CHART LEGEND

- A INLET TO OUTLET
- B CENTRE TO FACE
- C OVERALL LENGTH

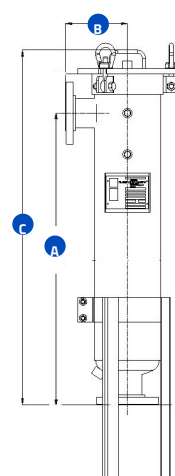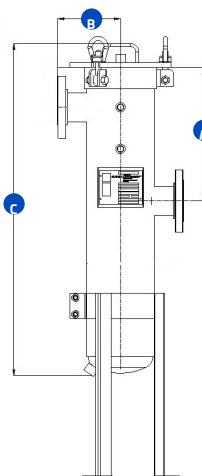

55 Stafford Court, Cambridge, ON N1T 1B3 P (519) 623-7448 F (519) 623-8807

For more information, e-mail: info@fil-trek.com or visit Fil-Trek.com


SL SERIES

Single Bag Filter Housings

- Side Line Bag Filter Housing
- ASME Design/Industrial Design
- Universal



FLOW CHARTS

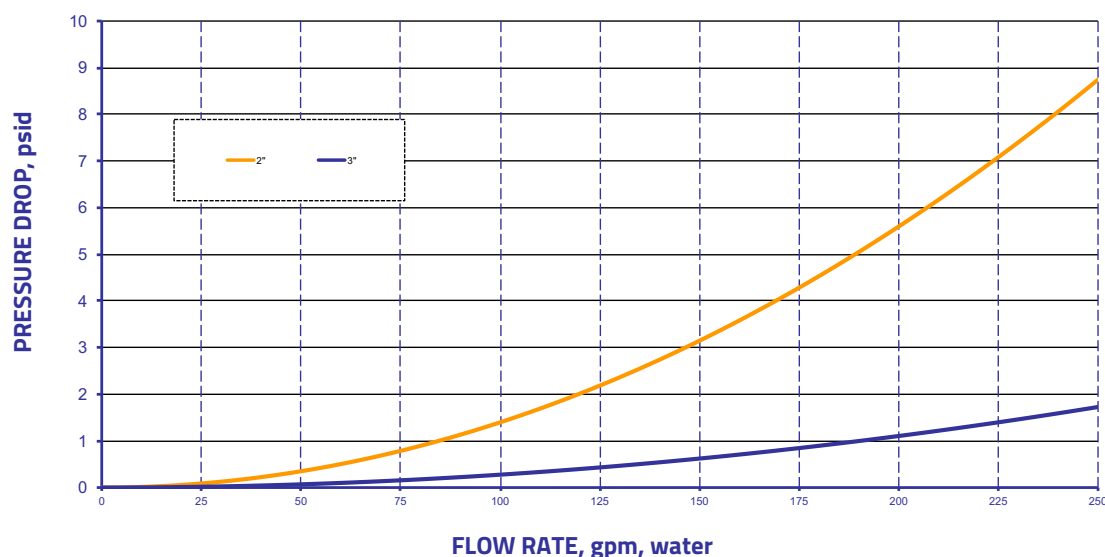

PRODUCT NOMENCLATURE

S4	SL	1	12	3F	SW	-
MATERIAL	MODEL	# OF BASKETS	BASKET LENGTH	CONNECTION TYPE	CLOSURE STYLE	OPTIONS
(-) – CARBON S4 – SS304 S6 – SS316	SL - ASME CODE ESL - NON ASME	1	11 - SIZE 1 12 - SIZE 2	2P - 2" NPT 2F - 2" FLANGE 3P - 3" NPT 3F - 3" FLANGE	SW - SWING BOLT	See "Housing Options" for options

NOTE: The SL series is an ASME code stamped housing. This vessel is also available in an industrial non-code design.



55 Stafford Court, Cambridge, ON N1T 1B3 P (519) 623-7448 F (519) 623-8807

For more information, e-mail: info@fil-trek.com or visit Fil-Trek.com