



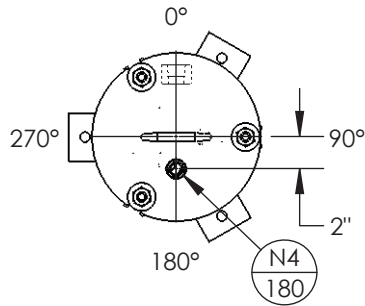


NOZZLE SCHEDULE			
MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" 3000# NPT	INLET
N2	1	2" 3000# NPT	OUTLET
N3	2	1/2" 3000# NPT	PRESSURE GAUGE
N4	1	1/2" 3000# NPT	VENT
N5	1	1" 3000# NPT	CLEAN DRAIN
N6	1	1" 3000# NPT	DIRTY DRAIN

VESSEL DESIGN CONDITIONS	
CODE:	ASME CODE SECTION VIII DIV 1, 2017 EDITION
M.A.W.P.:	150 PSI @ 400°F
M.D.M.T.:	-50° F @ 150 PSI
M.A.W.P.:	FV PSI @ 400°F
CORROSION ALLOWANCE:	NONE
HYDROTEST PRESS:	210 PSI
STAMP:	UM
SERVICE:	UNK. LIQUID NON LETHAL
PWHT:	N/A
RADIOGRAPHY:	N/A
MATERIAL:	SS316
GASKET:	BUNA

NOTES:

1. VESSEL WILL HOUSE (QTY=3) 2.5" OD x 20" LG. CARTRIDGES.
2. DRY WEIGHT: 66.52 LBS
3. FLOODED WEIGHT: 107 LBS
4. SHIPPING WEIGHT: 130 LBS
5. VESSEL VOLUME: 0.60 FT³

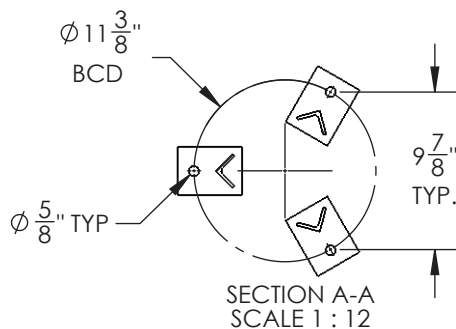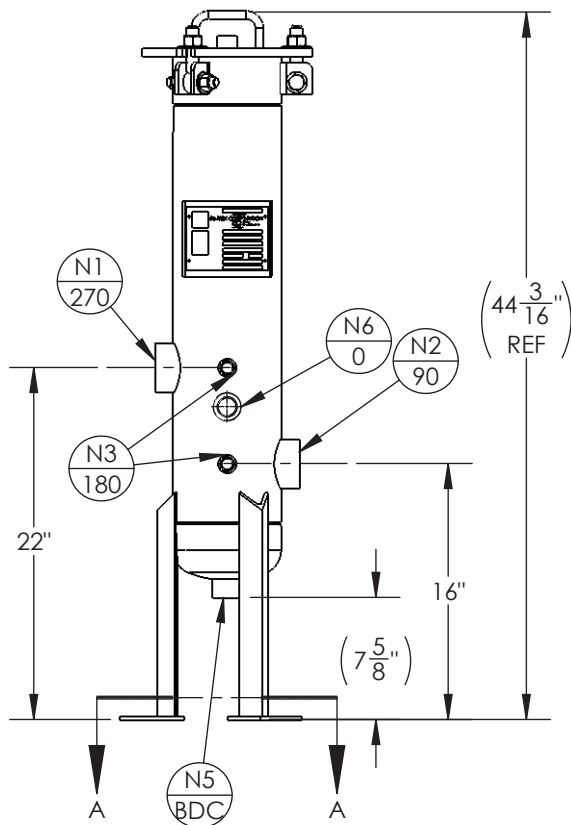

APPROVED WITH MARK-UPS			APPROVED		
 THIRD ANGLE PROJECTION TOLERANCES-UNLESS OTHERWISE NOTED DECIMAL .X =±.1" .XX = ±.02" .XXX = ±.005" FRACTIONAL .XX = ±1/8" ANGULAR =± 1° MAX. MACHINED SURFACE FINISH 125/√			 FIL-TREK CORPORATION 55 Stafford Court Cambridge, Ontario N1T 1B3 Canada Phone: (519) 623-7448 Fax: (519) 623-8807 Email: info@fil-trek.com Website: www.fil-trek.com THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION EQUIPMENT: GL SERIES (CARTRIDGE FILTER HOUSING) MODEL NO: S6GL06-003-2-2P-150 CUSTOMER:		
PARENT: NEW DESIGN			DRAWN: JN	DATE: 30/11/19	SERIAL No.
			CHK'D: NV	SCALE: NTS	Part No. 001001-00450
			REV. No. 0		