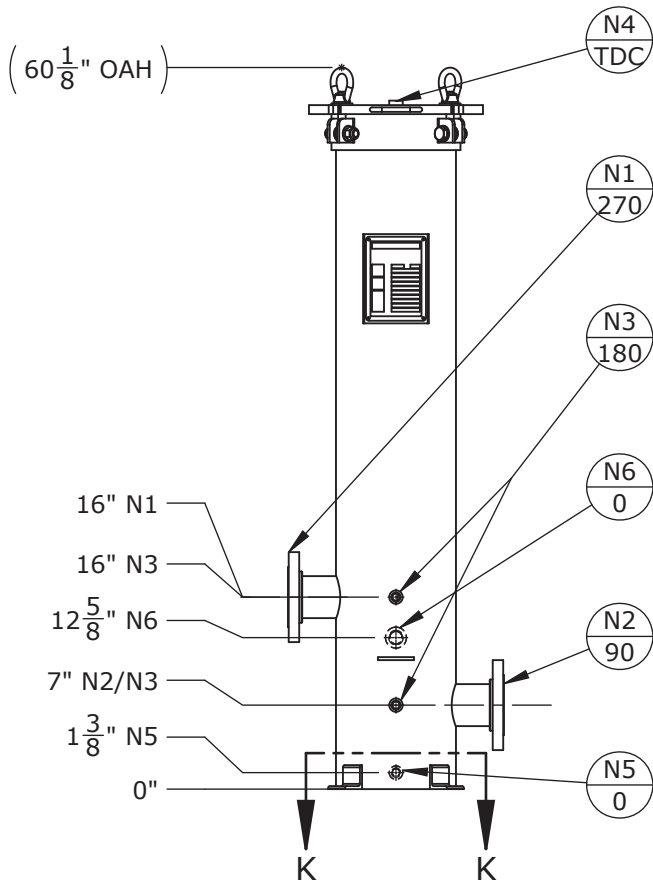
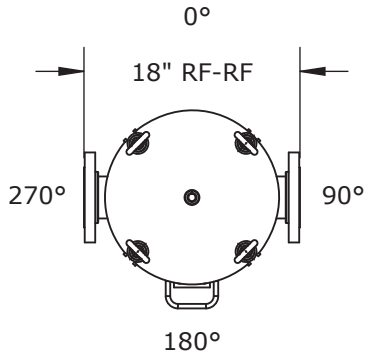


SECTION K-K
SCALE 1 : 16

NOZZLE SCHEDULE

MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	3" RFSO CL150	INLET
N2	1	3" RFSO CL150	OUTLET
N3	2	1/2" NPT CL3000	PRESSURE GAUGE
N4	1	1/2" NPT CL3000	VENT
N5	1	1/2" NPT CL3000	CLEAN DRAIN
N6	1	1" NPT CL3000	DIRTY DRAIN

VESSEL DESIGN CONDITIONS

CODE: BEST COMMERCIAL PRACTICES

M.A.W.P.: 150 PSI @ 250°F

M.D.M.T.: -20°F @ 150 PSI

M.A.W.P.: FV PSI @ 250°F

HYDROTEST PRESS: 195 PSI

CORROSION ALLOWANCE: N/A

SERVICE: UNK. LIQUID, NON-LETHAL

STAMP: N/A

RADIOGRAPHY: N/A

PWHT: N/A


GASKET: ☐ BUNA ☐ VITON ☐ EPDM
☐ OTHER:

NOTES:

DRY WEIGHT: 170 LBS
SHIPPING WEIGHT: 220 LBS
VOLUME: 2.29 CU. FT.
INTERNALS: 9x 2.5" OD FILTER
CARTRIDGES

FACTORY INSTALLED OPTIONS:

☐ STAINLESS STEEL BOLTING (SS316)
☐ N3 DIFFERENTIAL PRESSURE GAUGE
TYPE:
☐ N4 PRESSURE RELIEF VALVE
TYPE:
☐ N4 AIR ELIMINATOR
TYPE:
☐ N4 VENT VALVE
☐ N5/N6 DRAIN VALVES

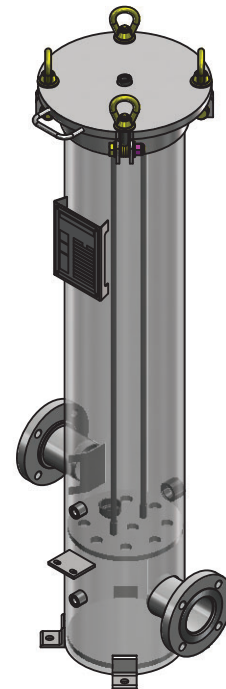

APPROVED WITH MARK-UPS ☐

APPROVED ☐



THIRD ANGLE
PROJECTION

TOLERANCES-UNLESS
OTHERWISE NOTED

DECIMAL .X = ±.1"

.XX = ±.02"

.XXX = ±.005"

FRACTIONAL = ±1/8"

ANGULAR = ± 1°

MAX. MACHINED
SURFACE FINISH 125

VESSEL
QUANTITY:



FIL-TREK CORPORATION

55 Stafford Court
Cambridge, Ontario
N1T 1B3
Canada

Phone: (519) 623-7448
Fax: (519) 623-8807
Email: info@fil-trek.com
Website: www.fil-trek.com

THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED
IN ANY WAY DETRIMENTAL TO THE CORPORATION

EQUIPMENT: EAQ SERIES (CARTRIDGE FILTER VESSEL)

MODEL NO: S4EAQ10-009-4-3F-150

CUSTOMER:

DRAWN: AJ

DATE: 2020-03-05

SERIAL No.

Part No. 001021-00144

REV. No. 0

CHK'D: TS

SCALE: NTS