


NOZZLE SCHEDULE			
MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" 150# NPT	INLET
N2	1	2" 150# NPT	OUTLET
N3	2	1/2" 3000# NPT	PRESSURE GAUGE
N4	1	1/2" 3000# NPT	VENT
SPARE	1	2" 150# NPT	SPARE

VESSEL DESIGN CONDITIONS	
CODE: BEST COMMERCIAL PRACTICE	
M.A.W.P.: 150 PSI @ 400°F	GASKET: BUNA-N
M.A.W.P.: FV PSI @ 400°F	
M.D.M.T.: -50° F @ 150 PSI	
HYDROTEST PRESS: 210 PSI	
MATERIAL: SS 316	

NOTES:

1. VESSEL WILL HOUSE (QTY=1) SINGLE LENGTH BASKET.
2. DRY WEIGHT: 70 LBS
3. FLOODED WEIGHT: 125 LBS
4. SHIPPING WEIGHT: 125 LBS
5. VESSEL VOLUME: 0.70 FT³

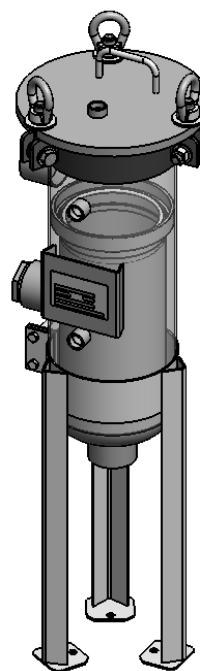

APPROVED WITH MARK-UPS <input type="checkbox"/>		APPROVED <input type="checkbox"/>				
<p>THIRD ANGLE PROJECTION</p> <p>TOLERANCES-UNLESS OTHERWISE NOTED</p> <p>DECIMAL .X = ±.1" .XX = ±.02" .XXX = ±.005"</p> <p>FRACTIONAL = ±1/8"</p> <p>ANGULAR = ± 1°</p> <p>MAX. MACHINED SURFACE FINISH 125/√</p>	<p>FIL-TREK CORPORATION</p> <p>55 Stafford Court Cambridge, Ontario N1T 1B3 Canada</p> <p>Phone: (519) 623-7448 Fax: (519) 623-8807 Email: info@fil-trek.com Website: www.fil-trek.com</p>	<p>THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION</p>				
		EQUIPMENT: ESL SERIES (BAG FILTER HOUSING)		MODEL NO: S6ESL111-2P-CD-150		
PARENT:		DRAWN: JN	DATE: 19/04/2018	SERIAL No.	Part No. 002001-20038	REV. No. 0
CHK'D: JJJ		SCALE: NTS				