





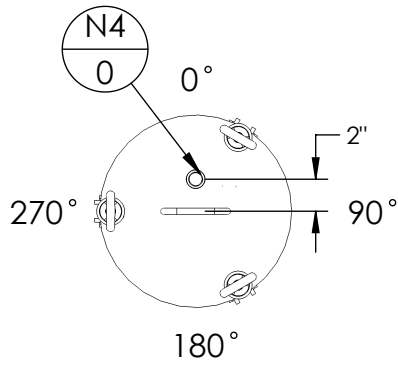


NOZZLE SCHEDULE			
MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" 150# NPT	INLET
N2	1	2" 150# NPT	OUTLET
N3	2	1/2" 3000# NPT	PRESSURE GAUGE
N4	1	1/2" 3000# NPT	VENT
N5	1	1/2" 3000# NPT	CLEAN DRAIN
N6	1	1/2" 3000# NPT	DIRTY DRAIN

VESSEL DESIGN CONDITIONS			
CODE: BEST COMMERCIAL PRACTICE			
M.A.W.P.:	150 PSI @ 250°F	GASKET:	BUNA
M.A.W.P.:	FV PSI @ 250°F		
M.D.M.T.:	-50° F @ 150 PSI		
HYDROTEST PRESS:	150 PSI		
MATERIAL:	SS304		

NOTES:

- VESSEL WILL HOUSE (QTY=5) 2.5" OD x 20" LG DOE CARTRIDGES.
- DRY WEIGHT: 95 LBS
- FLOODED WEIGHT: 160 LBS
- SHIPPING WEIGHT: 150 LBS
- VESSEL VOLUME: 0.9 C.F.

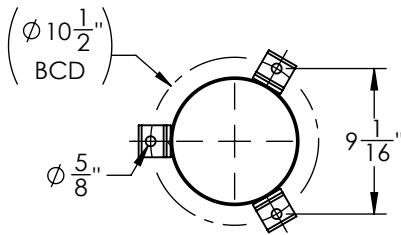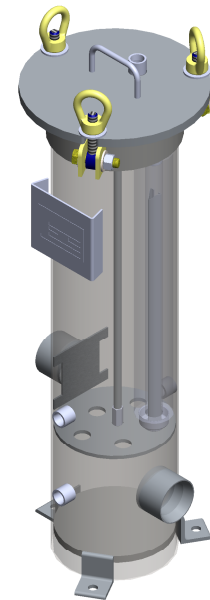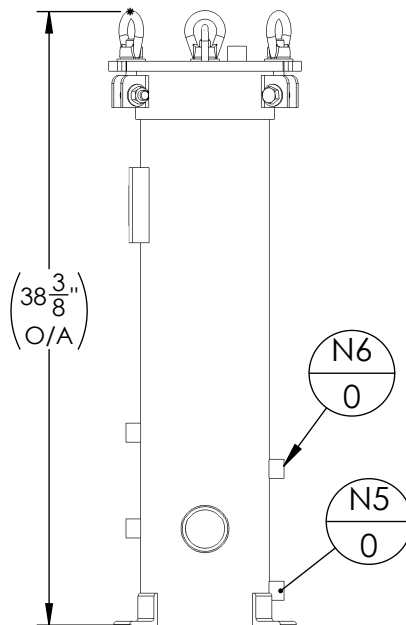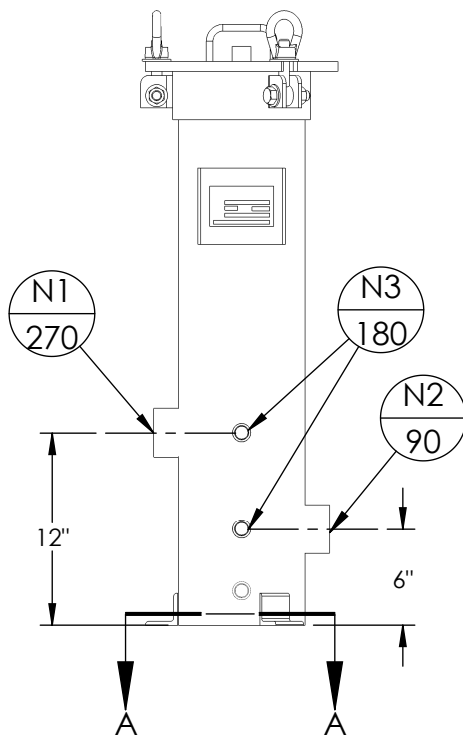

SECTION A-A
SCALE 1 : 12

APPROVED WITH MARK-UPS ☐

APPROVED ☐



THIRD ANGLE
PROJECTION
TOLERANCES-UNLESS
OTHERWISE NOTED
DECIMAL .X = ±.1"
.XX = ±.02"
.XXX = ±.005"
FRACTIONAL .X = ±1/8"
ANGULAR = ± 1°
MAX. MACHINED
SURFACE FINISH 125/



FIL-TREK CORPORATION

55 Stafford Court
Cambridge, Ontario
N1T 1B3
Canada

Phone: (519) 623-7448
Fax: (519) 623-8807
Email: info@fil-trek.com
Website: www.fil-trek.com

THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION

EQUIPMENT: EAQ SERIES (CARTRIDGE FILTER HOUSING)

MODEL NO: S4EAQ08-005-2-2P-150

CUSTOMER:

PARENT:
NONE

DRAWN: GB

DATE:
09/03/2018

SERIAL No.

Part No.
001021-00060

REV. No.
0

CHK'D:

SCALE: NTS