

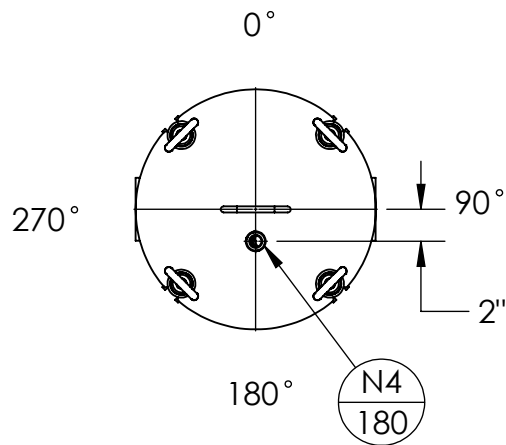
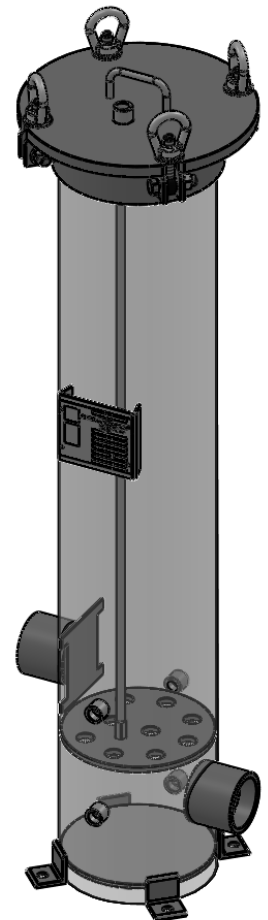


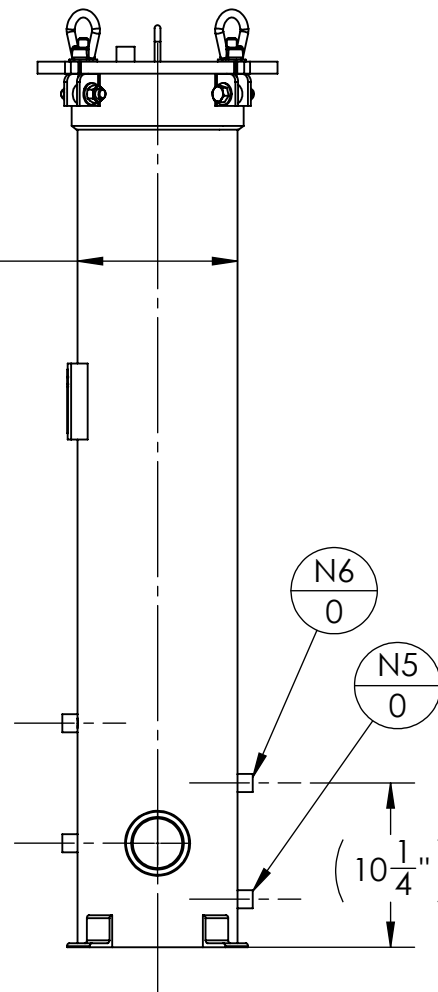

NOZZLE SCHEDULE			
MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	3" 150# NPT	INLET
N2	1	3" 150# NPT	OUTLET
N3	2	1/2" 3000# NPT	PRESSURE GAUGE
N4	1	1/2" 3000# NPT	VENT
N5	1	1/2" 3000# NPT	CLEAN DRAIN
N6	1	1/2" 3000# NPT	DIRTY DRAIN
VESSEL DESIGN CONDITIONS			
CODE: BEST COMMERCIAL PRACTICE			
M.A.W.P.:	150 PSI @ 250°F	GASKET:	BUNA
M.A.E.P.:	15 PSI @ 250°F		
M.D.M.T.:	-20° F @ 150 PSI		
HYDROTEST PRESS:	195 PSI		
MATERIAL:	SS304		

NOTES:

1. VESSEL WILL HOUSE (QTY=7) 2.5" OD x 40" LG, CARTRIDGES.
2. DRY WEIGHT: 132.84 LBS
3. FLOODED WEIGHT: 280 LBS
4. SHIPPING WEIGHT: 200 LBS
5. VESSEL VOLUME: 2.40 FT³

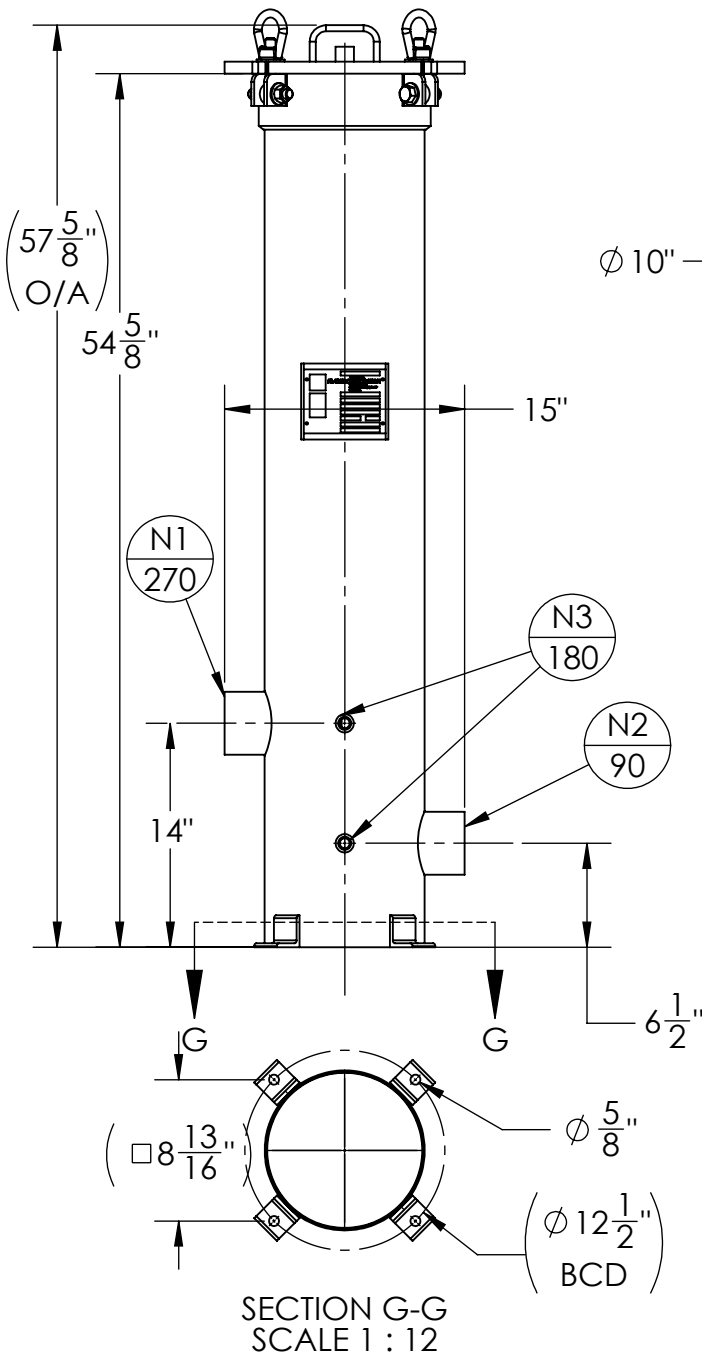

APPROVED WITH MARK-UPS ☐

APPROVED ☐



THIRD ANGLE
PROJECTION
TOLERANCES-UNLESS
OTHERWISE NOTED
DECIMAL .X = ±.1"
.XX = ±.02"
.XXX = ±.005"
FRACTIONAL 1/8" = ±1/8"
ANGULAR = ± 1°
MAX. MACHINED
SURFACE FINISH 125/



FIL-TREK CORPORATION

55 Stafford Court
Cambridge, Ontario
N1T 1B3
Canada

Phone: (519) 623-7448
Fax: (519) 623-8807
Email: info@fil-trek.com
Website: www.fil-trek.com

THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION

EQUIPMENT: CARTRIDGE FILTER VESSEL (EAQ SERIES)

MODEL NO: S4EAQ10-009-4-3P-150

CUSTOMER:

PARENT:
NEW DESIGN

DRAWN: JN
CHK'D:

DATE:
28/04/2017
SCALE: NTS

SERIAL No.

Part No.
001021-00032

REV. No.
2