
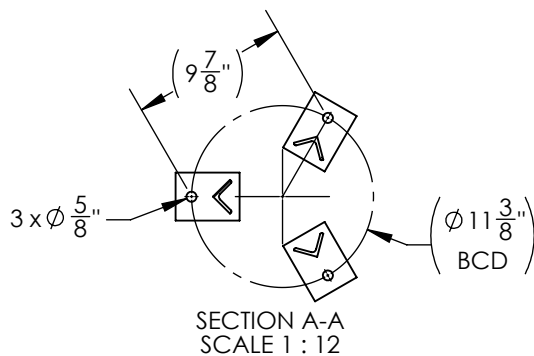
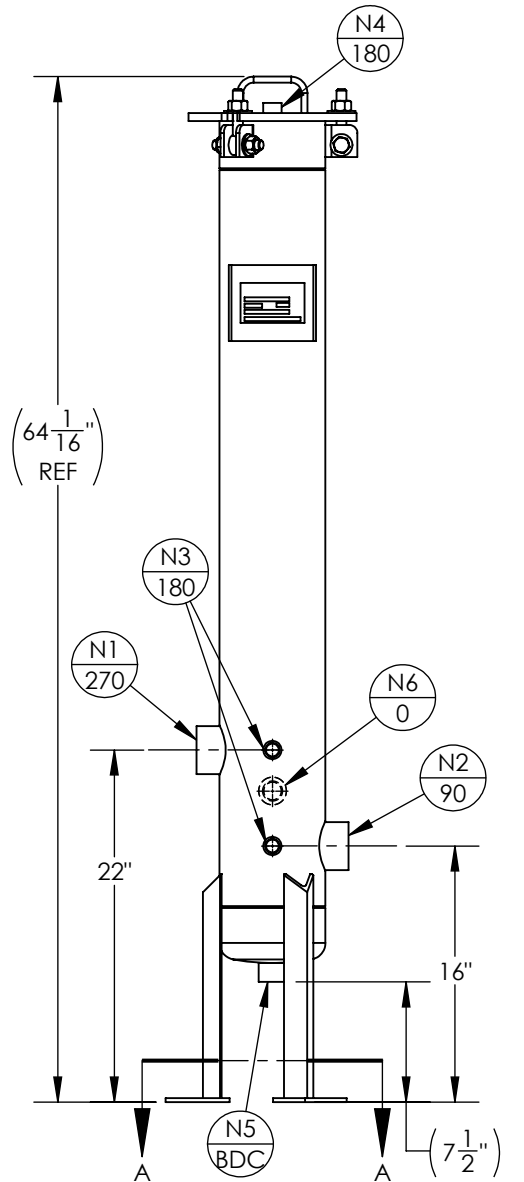


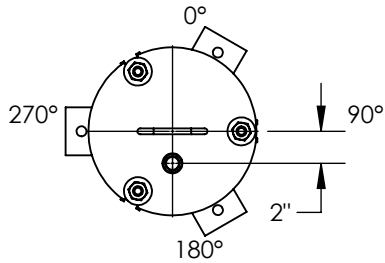

NOZZLE SCHEDULE


MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" 150# NPT	INLET
N2	1	2" 150# NPT	OUTLET
N3	2	1/2" 3000# NPT	PRESSURE GAUGE
N4	1	1/2" 3000# NPT	VENT
N5	1	1" 3000# NPT	CLEAN DRAIN
N6	1	1" 3000# NPT	DIRTY DRAIN

VESSEL DESIGN CONDITIONS

CODE: BEST COMMERCIAL PRACTICE			
M.A.W.P.:	150 PSI @ 400°F	GASKET:	BUNA-N
M.A.E.P.:	FV PSI @ 400°F		
M.D.M.T.:	-20° F @ 150 PSI		
HYDROTEST PRESS:	150 PSI		
MATERIAL:	SS 304		

NOTES:

- VESSEL WILL HOUSE (QTY=3) 2.5" OD x 40" LG. CARTRIDGES.
- DRY WEIGHT: 80.26 LBS
- FLOODED WEIGHT: 140 LBS
- SHIPPING WEIGHT: 135 LBS
- VESSEL VOLUME: 0.82 FT³

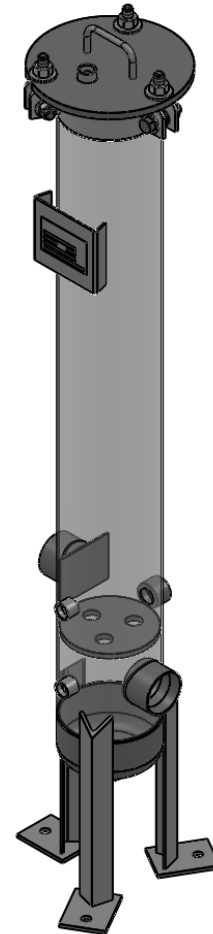

APPROVED WITH MARK-UPS

APPROVED



THIRD ANGLE PROJECTION
TOLERANCES-UNLESS OTHERWISE NOTED
DECIMAL .X = ±.1"
.XX = ±.02"
.XXX = ±.005"
FRACTIONAL = ±1/8"
ANGULAR = ± 1°
MAX. MACHINED SURFACE FINISH 125/√



FIL-TREK CORPORATION

55 Stafford Court
Cambridge, Ontario
N1T 1B3
Canada

Phone: (519) 623-7448
Fax: (519) 623-8807
Email: info@fil-trek.com
Website: www.fil-trek.com

THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION

EQUIPMENT: EGL SERIES (CARTRIDGE FILTER HOUSING)

MODEL NO: S4EGL06-003-4-2P-150

CUSTOMER:

PARENT: NEW DESIGN

DRAWN: JN
CHK'D:

DATE: 03/04/2017
SCALE: NTS

SERIAL No.

Part No. 001022-00076

REV. No.

0