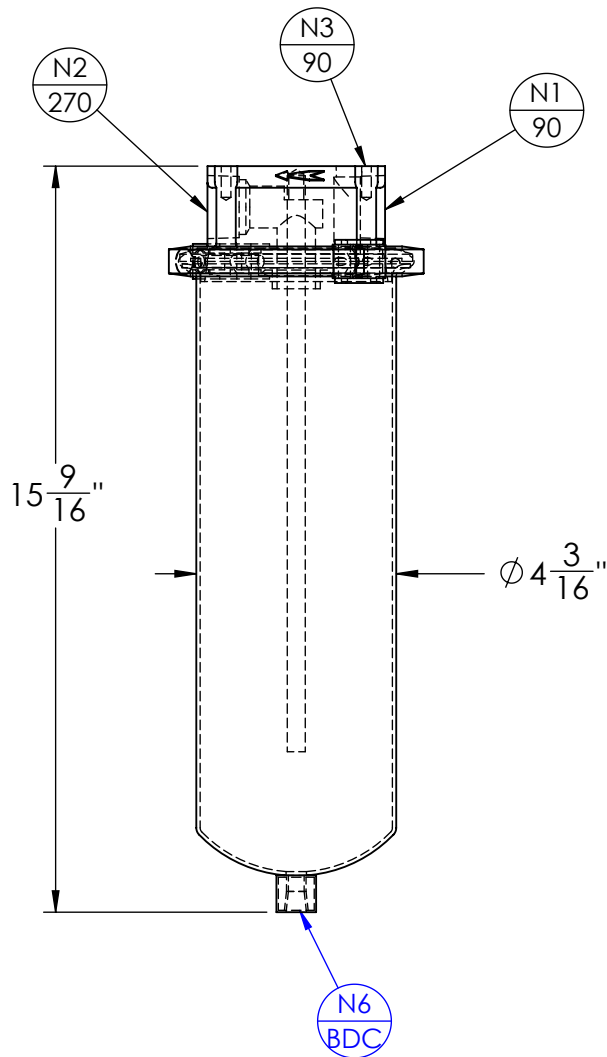
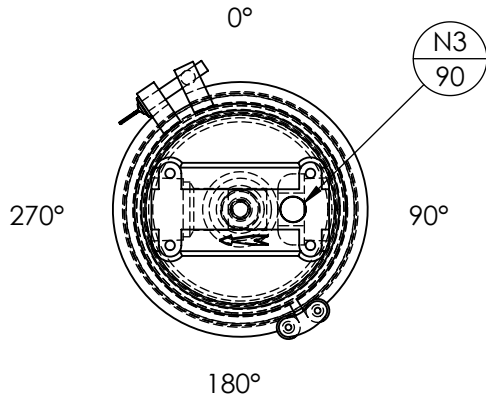


NOZZLE SCHEDULE			
MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	1" NPT	INLET
N2	1	1" NPT	OUTLET
N3	1	1/4" NPT	PRESS GA
N4	0	-	VENT
N5	0	-	CLEAN DRAIN
N6	1	1/4" 3000# NPT	DIRTY DRAIN
VESSEL DESIGN CONDITIONS			
CODE: ASME SECTION VIII DIV. 1, 2010 EDITION			
M.A.W.P.: 150 PSI @ 250°F		M.D.M.T.: -20° F @ 150 PSI	
M.A.E.P.: 15 PSI @ 250°F			
CORROSION ALLOWANCE: NONE		HYDROTEST PRESS: 195 PSI	
STAMP: 'U' / NB		SERVICE: NON LETHAL	
PWHT: N/A		RADIOGRAPHY: N/A	
MATERIAL: SS-316		GASKET: BUNA-N	

REV.	DATE	REVISION	DRAWN	APP'D
FIL-TREK CORPORATION CAMBRIDGE ONTARIO - CANADA www.fil-trek.com • Tel: 519.623.7448 • Fax: 519.623.8807				
THIS DRAWING IS THE PROPERTY OF FIL-TREK CORPORATION AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION				
EQUIPMENT: FILTER HOUSING (LM SERIES)				
MODEL NO: S6LM01-1-1P				
CUSTOMER: -				
PARENT: NONE	DRAWN: JJJ	DATE: MAR 25 2011	JOB No. V-XXXX	DWG. No. 060-0001
PAGE: 1 OF 1	CHK'D: CW	SCALE: NTS		REV. No. 0