


NOZZLE SCHEDULE			
MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2"150# NPT	INLET
N2	1	2"150# NPT	OUTLET
N3	2	1/2" 3000# NPT	PRESS GA
N4	1	1/2" 3000# NPT	VENT
N5	1	1/2" 3000# NPT	CLEAN DRAIN
N6	1	1/2" 3000# NPT	DIRTY DRAIN

VESSEL DESIGN CONDITIONS	
CODE: BEST COMMERCIAL PRACTICE	
M.A.W.P.:	150 PSI @ 250°F
M.D.M.T.:	-20° F @ 150 PSI
M.A.E.P.:	15 PSI @ 250°F
CORROSION ALLOWANCE:	NONE
HYDROTEST PRESS:	150 PSI
STAMP:	XX
SERVICE:	NON LETHAL
PWHT:	N/A
RADIOGRAPHY:	N/A
MATERIAL:	SS316/L
GASKET:	BUNA-N

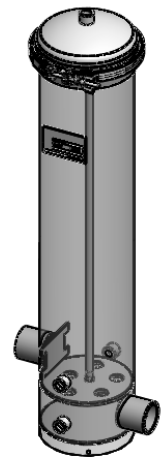

NOTES:

- VESSEL WILL HOUSE (QTY=5) 2.5" OD x 30" LG CARTRIDGES.

<p>THIRD ANGLE PROJECTION</p>	<p>FIL-TREK CORPORATION CAMBRIDGE ONTARIO - CANADA</p>			
	<p>www.fil-trek.com • Tel: 519.623.7448 • Fax: 519.623.8807</p>			
<p>TOLERANCES-UNLESS OTHERWISE NOTED</p>				
<p>DECIMAL .X = ±.1" .XX = ±.02" .XXX = ±.005"</p>				
<p>FRACTIONAL ≤24" = ±1/16" >24" = ±1/8"</p>				
<p>ANGULAR = ± 1°</p>				
<p>MAX. MACHINED SURFACE FINISH 125/√</p>				
<p>THIS DRAWING IS THE PROPERTY OF FIL-TREK CORPORATION AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION</p>				
EQUIPMENT:		CARTRIDGE FILTER HOUSING (AQ SERIES)		
MODEL NO:		S6EAQ08-005-3-2P-VB		
CUSTOMER:		FIL-TREK STOCK		
PARENT: NONE	DRAWN: TN	DATE: JULY 5 2012	JOB No. V-6099	DWG. No. 001 021 00019 001
PAGE: 1 OF 4	CHK'D: JJJ	SCALE: NTS		REV. No. 0