

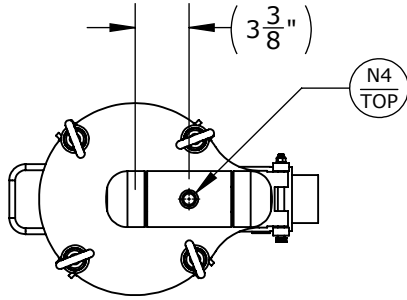
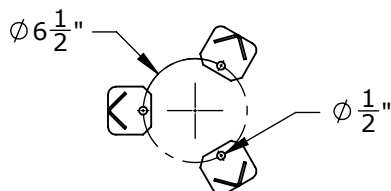


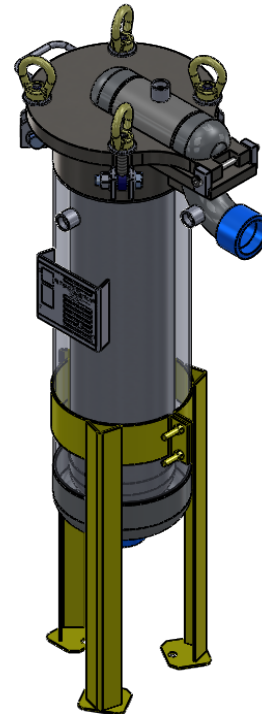

NOZZLE SCHEDULE			
MARK	QTY	SIZE / RATING	DESCRIPTION
N1	1	2" NPT CL3000	INLET
N2	1	2" NPT CL3000	OUTLET
N3	2	1/2" NPT CL3000	PRESSURE GAUGE
N4	1	1/2" NPT CL3000	VENT
VESSEL DESIGN CONDITIONS			
CODE: ASME SECTION VIII DIV. 1, 2017 EDITION			
M.A.W.P.: 150 PSI @ 250°F		M.D.M.T.: -20° F @ 150 PSI	
M.A.W.P.: FV PSI @ 250°F			
CORROSION ALLOWANCE: -		HYDROTEST PRESS: 195 PSI	
STAMP: UM		SERVICE: WATER	
PWHT: N/A		RADIOGRAPHY: N/A	
MATERIAL: SS304		GASKET: BUNA	

Notes

- Vessel will house 1 double length bag filter

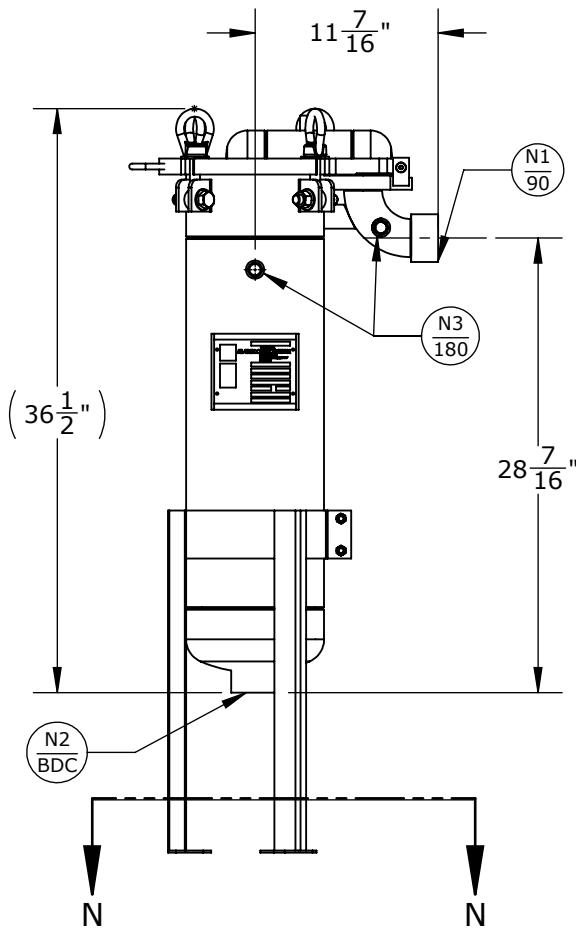

SECTION N-N

 THIRD ANGLE PROJECTION		 FIL-TREK CORPORATION		55 Stafford Court Cambridge, Ontario N1T 1B3 Canada		Phone: (519) 623-7448 Fax: (519) 623-8807 Email: info@fil-trek.com Website: www.fil-trek.com			
TOLERANCES-UNLESS OTHERWISE NOTED		THIS DRAWING IS THE PROPERTY OF 'FIL-TREK CORPORATION' AND MUST NOT BE COPIED OR USED IN ANY WAY DETRIMENTAL TO THE CORPORATION							
DECIMAL .X = ±.1" .XX = ±.02" .XXX = ±.005"									
FRACTIONAL = ±1/8"		EQUIPMENT:		TOP LINE SINGLE BAG FILTER HOUSING					
ANGULAR = ± 1°		MODEL NO:		S4TL112-2P-150					
MAX. MACHINED SURFACE FINISH 125 ✓		CUSTOMER:							
PARENT: NONE		DRAWN: AJ DATE: 10/05/2019		SERIAL No.		Part No. 002006-00025		REV. No. 0	
CHK'D:		SCALE: NTS							